



Stainless Forged Fittings


Anchor Shackles

Type 303-304 stainless, permanently marked "NM" for non-magnetic. Shackle bodies are Type 303 stainless; screw pins are Type 304. Type 304 stainless steel meets federal specifications QQ-S-00763 and MIL-F-17280C (SHIPS), Fig. 1, Type 1.

Larger sizes, chain shackles, other pin styles and stainless grades can be furnished on special order.



Size A, Inches	Stock Numbers			Dimensions, Inches						Tolerance, Inches (+ or -)		Weight Each, Pounds	Working Load Limit*, Pounds
	Round	Screw	Safety	B	C	D	E	F	Length	Width			
1/8	640-2604	640-2104	640-2404	3/16	17/16	7/2	3/4	17/16	1/8	1/16		.10	720
5/16	640-2605	640-2105	640-2405	3/8	1 1/4	8/16	7/8	3/4	1/8	1/16		.16	1,080
3/8	640-2606	640-2106	640-2406	7/16	1 7/16	1 1/16	1	15/16	1/8	1/16		.31	1,800
7/16	640-2607	640-2107	640-2407	1/2	1 3/4	3/4	1 1/16	1 1/8	1/8	1/16		.50	2,000
1/2	640-2608	640-2108	640-2408	9/16	1 15/16	13/16	1 1/4	1 1/4	1/8	1/16		.72	2,800
5/8	640-2610	640-2110	640-2410	5/8	2 7/16	1 7/8	1 1/2	1 5/8	1/8	1/16		1.38	4,400
3/4	640-2612	640-2112	640-2412	7/8	3	1 1/4	1 7/8	1 7/8	1/4	1/16		2.22	6,400
7/8	640-2614	640-2114	640-2414	1	3 3/4	1 7/8	2 1/8	2	1/4	1/16		3.28	8,800
1	640-2616	640-2116	640-2416	1 1/8	3 3/4	1 7/8	2 1/2	2 3/8	1/2	1/16		5.31	15,500

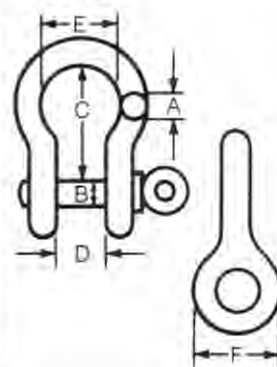


Lifting Eyes

Available in non-magnetic Type 303 or 18/8 Type 304.



K-1107

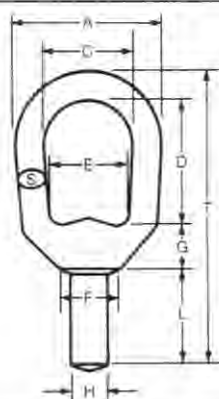


Stock Number	Dimensions, Inches										Weight Each, Pounds
	A	C	D	E	F	G	H	L	S	T	
640-3401	2	1 1/8	1 1/2	1	1 1/16	5/8	9/16	15/16	3/8	3 9/16	.45



K-1108

Stock Numbers		Dimensions, Inches							Weight Each, Pounds	Working Load Limit*, Pounds
Blank	Threaded	D	L	A	C	B	T			
640-7001	640-7101	1/4	3/4	1 1/8	3/4	3/16	1/2	.05	460	
640-7002	640-7102	5/16	17/16	1 1/8	5/8	1/4	7/16	10	780	
640-7003	640-7103	3/8	3/4	1 1/2	3/4	3/16	1/2	13	1,160	
640-7004	640-7104	1/2	3/4	2 1/16	1 3/16	7/16	5/8	25	2,150	

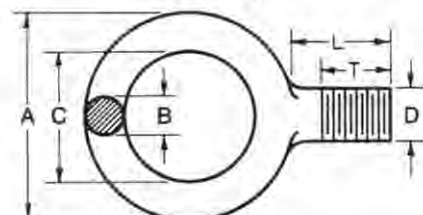

*Warning: Do not exceed Working Load Limit.