




Stainless Forged Fittings

Eye Nuts

Drop forged from 18/8, Type 303 stainless.
Supplied tapped as shown, but available blank on special order.

Size No.	Stock Numbers	Std. Tap, M, Inches	Dimensions, Inches							Weight Each, Pounds	Working Load Limit*, Pounds
			A	C	D	E	F	S	T		
1	640-3301	1/4	1 1/4	3/4	1 1/8	2 1/32	5/8	1/4	1 1/16	10	460
2	640-3302	5/16	1 1/4	3/4	1 1/8	2 1/32	1/2	1/4	1 1/16	10	780
3	640-3303	3/8	2	1 1/4	1 1/8	1	1 1/16	1/2	2 1/2	25	1,160
5	640-3305	1/2	2	1 1/4	1 1/8	1	1 1/16	3/8	2 1/2	25	2,150
6	640-3306	5/8	2 1/2	1 1/2	2	1 3/16	1	1/2	3 1/16	63	3,440
7	640-3307	3/4	3	1 3/4	2 3/8	1 1/4	1	3/8	3 3/8	100	5,140

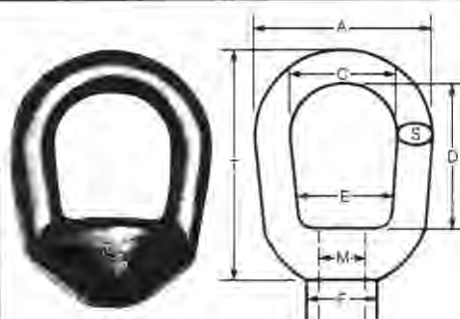

K-1109

Eye and Eye Swivels

Drop forged from Type 303 stainless. Larger sizes available on special order.

Size, Inches	Stock Numbers	Dimensions, Inches					Weight Each, Pounds	Working Load Limit*, Pounds
		A	B	C	D	R		
3/8	640-4006	2	1 1/4	1 1/4	1 1/2	4 5/16	.60	2,150
1/2	640-4008	2 1/2	1 3/8	1 1/2	2	5 7/16	1.25	3,440



K-1110

Jaw and Eye Swivels

Drop forged. Eye is Type 304, jaw is Type 303 and pin is 18/8 stainless steel. Larger sizes available on special order.

Size, Inches	Stock Numbers	Dimensions, Inches							Weight Each, Pounds	Working Load Limit*, Pounds
		A	B	C	K	N	P	R		
3/8	640-4106	2	1 1/4	1 1/4	5/8	1 1/8	3/8	3 5/8	56	2,150
1/2	640-4108	2 1/2	1 3/8	1 1/2	7/8	1 3/8	1/2	4 7/8	1.25	3,440



K-1114

Thimbles

Drop forged from Type 302 stainless.

Note: Thimbles are not designed for load carrying purposes; therefore, working load limits have not been established.



K-1115

For Rope Dia., Inches	Stock Numbers	Dimensions, Inches			Weight Per 100, Pounds
		Overall Thickness	Overall Length	Inside Width	
1/8	640-7502	3/32	1 3/4	2 3/32	3
3/16	640-7503	1/16	1 3/4	2 3/32	3
1/4	640-7504	3/8	1 7/8	2 3/32	5
5/16	640-7505	7/16	2 3/32	2 7/32	5
3/8	640-7506	1/2	2 1/4	3 1/32	8
1/2	640-7508	2 1/32	2 1/2	1 5/32	14

Heavy Thimbles

Drop forged from Type 304 stainless.



K-1116

For Rope Dia., Inches	Stock Numbers	Dimensions, Inches			Weight Per 100, Pounds
		Overall Thickness	Overall Length	Inside Width	
1/4	640-7604	1/32	2 3/16	1 7/8	7.5
5/16	640-7605	1/8	2 1/2	1 11/16	14
3/8	640-7606	2 1/32	2 1/4	1 1/8	25
1/2	640-7608	2 1/32	3 5/8	1 1/2	51
5/8	640-7610	1	4 1/4	1 3/4	75
3/4	640-7612	1 1/4	5	2	147

*Warning: Do not exceed Working Load Limit.