



W.J. KEATING LIMITED

STAINLESS STEEL SWIVELS

For high pressure, underwater & chemical applications

Pressure compensating up to depths of 10,000 feet.



K-2020



K-2021



K-2022



K-2023




K-2024



K-2025


Model	Wire Rope Size	a	b	c	d	e	f	g	h	Work Load Tons	Approx. Swivel Weight ¹⁻¹⁰
A ¹⁻¹⁰	1/4	3/4	2 1/4	3 1/4	1/2	1/2	1/2	1 1/2	1 1/2	.45	6 oz.
BB	1/2	1 1/4	3 1/4	5 1/4	3/4	3/4	3/4	3/2	3/4	.75	1#
B	3/4	1 3/4	5	6 3/4	1 1/4	1/2	1/2	3/4	1 1/2	1.5	2#
C	1	2	5 3/4	9 3/4	1 3/4	3/4	3/4	1 1/2	1 3/4	3	5#
D	1 1/4	2 1/2	9 3/4	11 1/4	1 1/2	1	1/2	1 1/2	1 3/4	5	10#
EE	1 1/2	3	10 1/4	13 3/4	1 1/2	1 1/4	1 1/4	1 1/2	2 1/2	8.5	15#
GG	1	4	15 1/2	19	1 3/4	1 1/4	1 1/4	1 1/2	3 1/4	15	43#
HH	1 1/2	5	18 3/4	22 1/4	2 1/4	2	2	1 1/2	3 3/4	35	85#
I	6	22 3/4	28 3/4	3	2 1/2	2 1/4	1 1/2	4	4 1/2	45	156#
JJ	7	24	31	3 1/2	3	2 1/2	1 1/2	4 1/2	4 1/2	60	229#
K	8	27	35	4	3 1/2	3 3/4	1 3/4	5	7 1/2	75	328#
KK	10	36 1/2	47 1/2	5 1/2	4 1/4	4 3/4	2	6 1/4	10	100	747#

For swivels over 100-ton capacity, write for details.

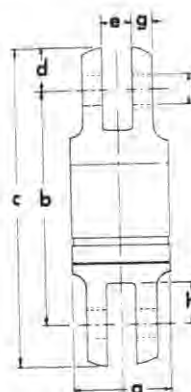

K-2020

K-2021

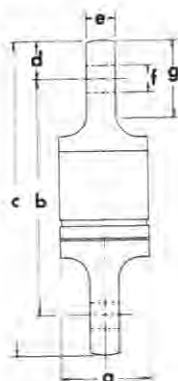

Model	Wire Rope Size	a	b	c	d	e	f	g	h	Work Load Tons	Approx. Swivel Weight ¹⁻¹⁰
A ¹⁻¹⁰	1/4	3/4	2 1/4	3 1/4	1/2	1/2	1/2	1 1/2	1 1/2	.45	5 oz.
BB	1/2	1 1/4	4 1/4	5 1/4	3/4	3/4	3/4	3/2	3/4	.75	1#
B	3/4	1 3/4	5	6 3/4	1 1/4	1/2	1/2	3/4	1 1/2	1.5	2#
C	1	2	5 3/4	9 3/4	1 3/4	3/4	3/4	1 1/2	1 3/4	3	5#
D	1 1/4	2 1/2	9 3/4	11 1/4	1 1/2	1	1/2	1 1/2	1 3/4	5	10#
EE	1 1/2	3	10 1/4	13 3/4	1 1/2	1 1/4	1 1/4	1 1/2	2 1/2	8.5	16#
GG	1	4	15 1/2	19	2 1/4	2	2	1 1/2	4 1/2	15	43#
HH	1 1/2	5	18 3/4	22 1/4	2 1/4	2 1/4	2 1/4	1 1/2	7	35	79#
I	6	22 3/4	28 3/4	3	2 1/2	2 1/4	1 1/2	4 1/2	4 1/2	45	142#
JJ	7	24	31	3 1/2	3 1/2	2 1/2	1 1/2	7	7	60	231#
K	8	27	35	4	3 1/2	3 3/4	1 3/4	8 1/4	8 1/4	75	340#
KK	10	36 1/2	47 1/2	5 1/2	4 1/4	4 3/4	2	11 1/4	10	100	704#

For swivels over 100-ton capacity, write for details.

**6 MODELS WITH CAPACITIES FROM
1 1/2 TON TO 600 TONS WORKING LOAD CAPACITIES**