




DANFORTH TYPE ANCHOR

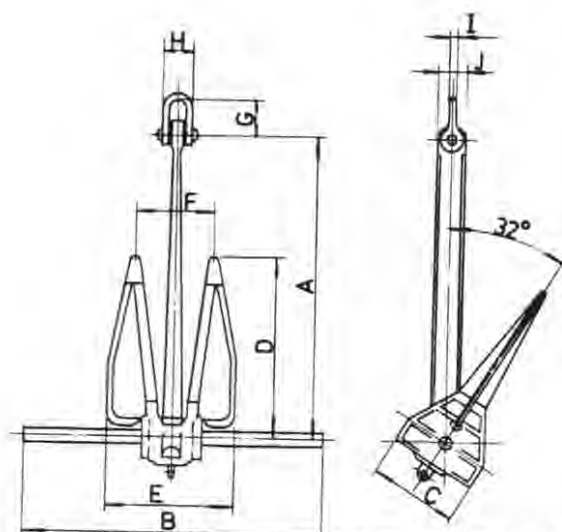

DIMENSIONS (mm)

ANCHOR WEIGHT		A	B	C	D	E	F	G	H	I	J
LBS	KG										
500	227	1289	1186	331	803	523	206	215	155	42	121
750	340	1476	1358	379	919	599	236	247	177	48	138
1000	454	1624	1494	418	1012	659	260	271	195	53	153
1500	680	1860	1711	478	1158	654	297	311	223	61	175
2000	907	2047	1883	526	1275	830	327	342	246	67	193
2500	1134	2205	2028	567	1373	894	353	368	264	72	208
3000	1361	2343	2155	602	1459	950	375	392	281	77	221
3500	1588	2466	2269	634	1536	1001	396	412	296	81	232
4000	1814	2579	2372	663	1606	1046	413	431	309	85	243
4500	2041	2682	2467	690	1670	1088	429	448	322	88	253
5000	2268	2778	2556	714	1730	1127	444	464	333	91	262
6000	2722	2952	2716	759	1839	1198	472	493	354	97	278
7000	3175	3108	2859	799	1936	1261	497	519	373	102	293
8000	3629	3249	2989	835	2024	1318	520	543	390	107	306
10000	4536	3500	3220	900	2180	1420	560	585	420	115	330
12000	5443	3719	3422	956	2316	1509	595	622	446	122	351
13000	5897	3820	3515	982	2380	1550	611	639	458	125	360
14000	6350	3915	3602	1007	2439	1588	626	654	470	129	369
15000	6804	4006	3686	1030	2495	1625	641	670	481	132	378
16000	7258	4094	3766	1053	2550	1661	655	684	491	134	386
20000	9072	4410	4057	1134	2747	1789	705	737	529	145	416
22000	9979	4551	4188	1170	2835	1847	728	761	546	149	429
25000	11340	4750	4370	1221	2959	1927	760	794	570	156	448
30000	13608	5048	4644	1298	3144	2048	808	844	606	166	476
35000	15876	5314	4889	1366	3310	2156	850	888	638	175	501
40000	18144	5556	5111	1429	3460	2254	889	929	667	182	524
50000	22680	5985	5506	1539	3728	2428	957	1000	718	197	564
60000	27220	6360	5851	1635	3961	2580	1017	1063	763	209	600
70000	31752	6695	6160	1722	4170	2716	1071	1119	803	220	631
80000	36288	7000	6440	1800	4360	2840	1120	1170	840	230	660
90000	40824	7280	6698	1872	4534	2954	1165	1217	874	239	686
100000	45360	7540	6937	1939	4697	3059	1206	1260	905	248	711