




OFFDRILL®

High Holding Power Anchor

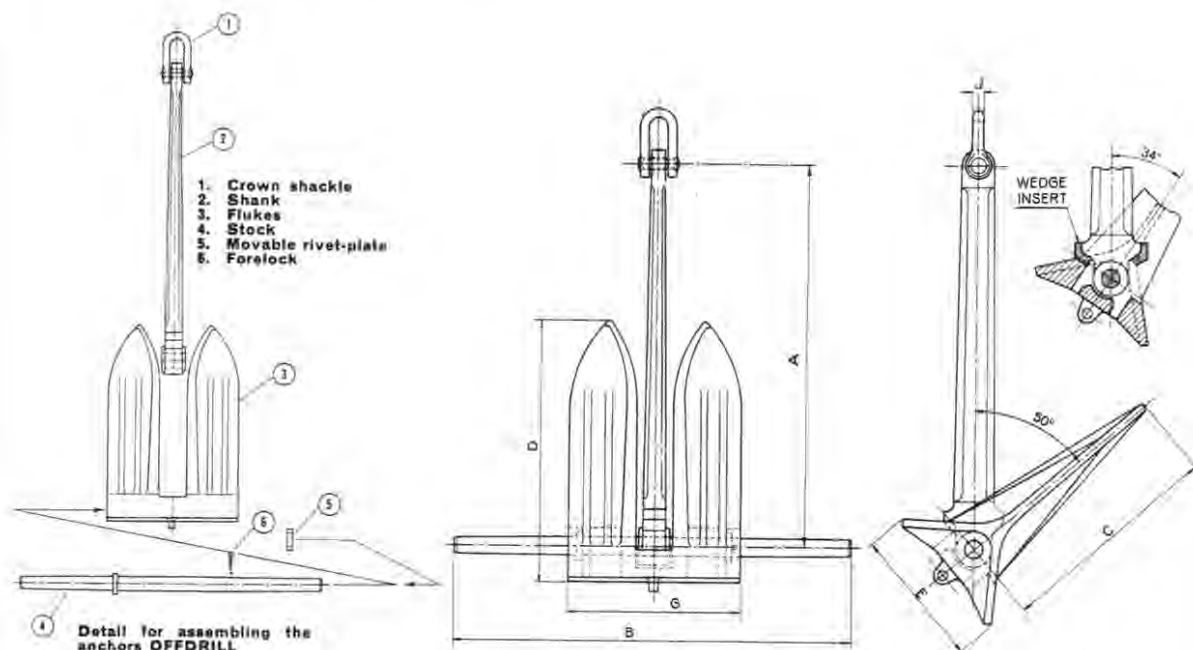

ANCHOR WEIGHT		DIMENSIONS IN mm							HOLDING POWER	
lbs.	kg	A	B	C	D	E	G	Ø of Shackle	α = 0° in Sand Bottom lbs.	α = 0° in Mud Bottom lbs.
500	227	1205	1330	725	865	395	495	40	25500	20500
1000	454	1520	1675	915	1090	500	625	50	40000	32500
1500	680	1770	2120	1050	1250	550	740	50	52000	42300
2000	908	1950	2340	1160	1380	605	815	65	62500	52700
2500	1134	2100	2520	1250	1485	650	875	65	72000	65000
3000	1360	2230	2655	1330	1560	680	930	75	82000	69000
3500	1588	2350	2820	1400	1665	730	980	75	90500	77700
4000	1814	2500	2945	1460	1740	800	1020	75	100000	84000
4500	2041	2555	3065	1520	1805	830	1065	80	108000	91000
5000	2268	2645	3175	1575	1870	860	1100	85	117000	97500
5500	2495	2815	3375	1675	1990	870	1170	100	132000	110000
6000	2722	2950	3540	1755	2090	915	1230	100	146000	123000
7000	3175	3335	3890	1840	2190	960	1290	105	165000	134800
8000	3629	3540	4000	1985	2360	1035	1390	115	188800	155200
10000	4540	3540	4250	2110	2505	1095	1475	125	209000	175100
12000	5443	3728	4500	2220	2640	1155	1555	130	243500	203000
14000	6350	3900	4750	2220	2640	1200	1555	130	254000	212000
15000	6810	3900	4750	2320	2760	1205	1625	130	294500	249600
16000	7258	4200	4900	2500	2975	1360	1750	145	341100	286500
20000	9070	4500	5165	2680	3190	1485	1875	155	386000	323500
25000	11325	4810	5335	2860	3405	1565	2000	165	428000	358000
30000	13620	4900	5390	2955	3515	1610	2070	170	468000	382000
34000	15854	5120	5635	3090	3675	1685	2165	180	507500	424000
40000	18120	5330	5865	3215	3825	1750	2250	180	546000	454000
45000	20385	5600	6150	3360	4000	1840	2365	200	615200	514500
50000	22700	5950	6535	3570	4250	1955	2515	215	679000	569000
60000	27261	6260	6875	3755	4470	2055	2645	215		