



## CONNECTING LINKS

### Flat Connecting Links

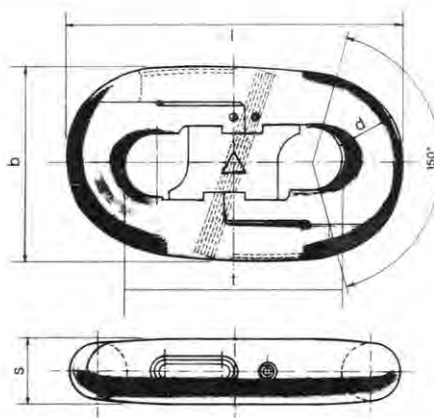


Table H

| Nominal Size<br>mm | d        | t          | b<br>max. | l<br>max. | S  | Spiral<br>Pin Size | Test<br>Load kN | Unit Wt.<br>~ kg |
|--------------------|----------|------------|-----------|-----------|----|--------------------|-----------------|------------------|
| 18 x 64            | 18 ± 0.5 | 64 ± 0.6   | 62        | 101       | 20 | 6 x 60             | 320             | 0.63             |
| 22 x 86            | 22 ± 0.7 | 86 ± 0.9   | 82        | 132       | 26 | 8 x 75             | 480             | 1.35             |
| 24 x 86            | 24 ± 0.8 | 86 ± 0.9   | 84        | 136       | 29 | 8 x 80             | 570             | 1.50             |
| 24 x 87.5          | 24 ± 0.8 | 87.5 ± 0.9 | 84        | 137       | 29 | 8 x 80             | 570             | 1.50             |
| 26 x 92            | 26 ± 0.8 | 92 ± 1     | 94        | 146       | 30 | 8 x 90             | 640             | 1.90             |
| 30 x 108           | 30 ± 0.9 | 108 ± 1    | 107       | 171       | 36 | 8 x 100            | 850             | 3.00             |

### Pan Connector Links



Table I

| Nominal Size<br>d<br>mm | Pitch<br>t<br>mm | Inside Width<br>b <sub>i</sub> min.<br>mm | Outside Width<br>b <sub>o</sub> max.<br>mm | Weight<br>kg |
|-------------------------|------------------|-------------------------------------------|--------------------------------------------|--------------|
| 22                      | 140              | 26                                        | 74                                         | 1.15         |
| 26                      | 151              | 30                                        | 86                                         | 1.75         |
| 30                      | 185              | 70                                        | 137                                        | 3.00         |