




HEAVY DUTY STEEL OPEN STRAND SOCKETS

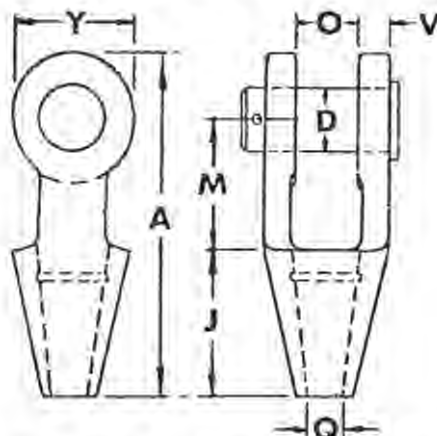

Material: Sockets shall be of Cast Steel and to ASTM A-148 Grade 80-50 specification.

Testing: At the request of the customer any of the following tests may be conducted on 100% of production runs:

- (a) Full radiographed to Specification ASTM E-466 or E-186
- (b) Full Ultrasonic Testing
- (c) Full Magnetic Particle Testing in accordance with ASTM E-109-63

Finishes:

- (a) Painted
- (b) Zinc Coated - to Canadian C.S.A. Specification G-164 or to ASTM A-153 Class A.

Part No.	Strand Diam. in	A in	J in	M in	O in	Q in	V in	Y in	D in	Wt lb
090-0207										
090-0225	1/2	6 3/4	3	2 1/2	1 1/4	1 1/16	9/16	2 1/4	1 3/16	4
090-0243	5/16	7 15/16	3 1/2	3	1 1/2	1 3/16	21/32	2 5/8	1 3/8	6
090-0261	11/16	9 1/4	4	3 1/2	1 3/4	31/32	3/4	3 1/8	1 5/8	9
090-0289	13/16	10 9/16	4 1/2	4	2	1 1/8	7/8	3 3/4	2	15
090-0305	15/16	11 13/16	5	4 1/2	2 1/4	1 1/4	1	4 1/8	2 1/4	23
090-0323	1 1/16	13 3/16	5 1/2	5	2 1/2	1 1/2	1 1/8	4 3/4	2 1/2	30
090-0341	1 3/16	15 1/8	6	6	3	1 5/8	1 3/16	5 5/8	2 3/4	43
090-0216	1 5/16	16 1/4	6 1/2	6 1/2	3	1 3/4	1 5/16	5 3/4	3	52
090-0234	1 7/16	18 1/4	7 1/2	7	3 1/2	2	1 1/2	6 1/2	3 1/2	80
090-0252	1 11/16	21 1/2	8 1/2	9	4	2 1/4	1 3/4	7	3 3/4	120
090-0270	1 13/16	21 1/2	8 1/4	9	4 1/4	2 1/4	1 3/8	7	4	120
090-0298	1 15/16	23 1/2	9	10	4 1/2	2 3/16	2 1/8	7 3/4	4 1/4	182
090-0314	2 1/16	23 1/2	9	10	4 1/2	2 3/16	2 1/8	7 3/4	4 1/2	182
090-0332	2 3/16	26 1/2	10 1/2	11	5	2 7/8	2 3/8	8 1/2	4 3/4	256
090-0350	2 5/16	28 1/8	11 1/2	11 1/2	5 1/4	3 1/8	2 7/8	9	5	322
090-0403	2 7/16	28 3/4	11 1/2	11 1/2	5 3/4	3 5/16	3	9 1/2	5 1/4	335
090-0421	2 9/16	30 1/2	12 1/2	12	6	3 5/16	3	9 3/4	5 3/4	430
090-0449	2 11/16	30 5/8	12 1/2	12	6 1/4	3 5/8	3 1/8	10	6	435
090-0467	3 1/8	32 1/2	13 1/4	12 1/2	6 3/4	3 7/8	3 1/4	10 3/4	6 1/2	455
090-0485	3 3/8	34 3/4	14	13	7 1/4	3 7/8	3 5/16	11 3/4	6 3/4	565
090-0500	3 5/8	36 1/4	15	13 1/2	7 1/2	4 1/4	3 1/2	12 1/2	7	780
090-0528	3 7/8	38 3/4	15 1/2	14 1/4	8	4 5/16	3 5/8	13	7 1/2	798