



W.J. KEATING LIMITED

735 AVOCA AVENUE, DORVAL, QUE., CANADA, H9P 1G4 TEL. 514-631-9815 TELEX 05-822633


DYNALUBE

THE NEW SYSTEM OF WIRE ROPE LUBRICATION

The DYNALUBE Wire Rope Lubricating System has been specifically designed so that in a single pass a wire rope can have:

1. Its outer surface scraped clean.
2. Lubricant pressure-injected without spillage or wastage, to the very core of the rope thus removing the corrosion-creating moisture.
3. Lubricant applied smoothly and uniformly to the surface of the rope.

All the above can be achieved with rope-travel speed of up to 3,500 metres per hour, depending on diameter of rope, etc.

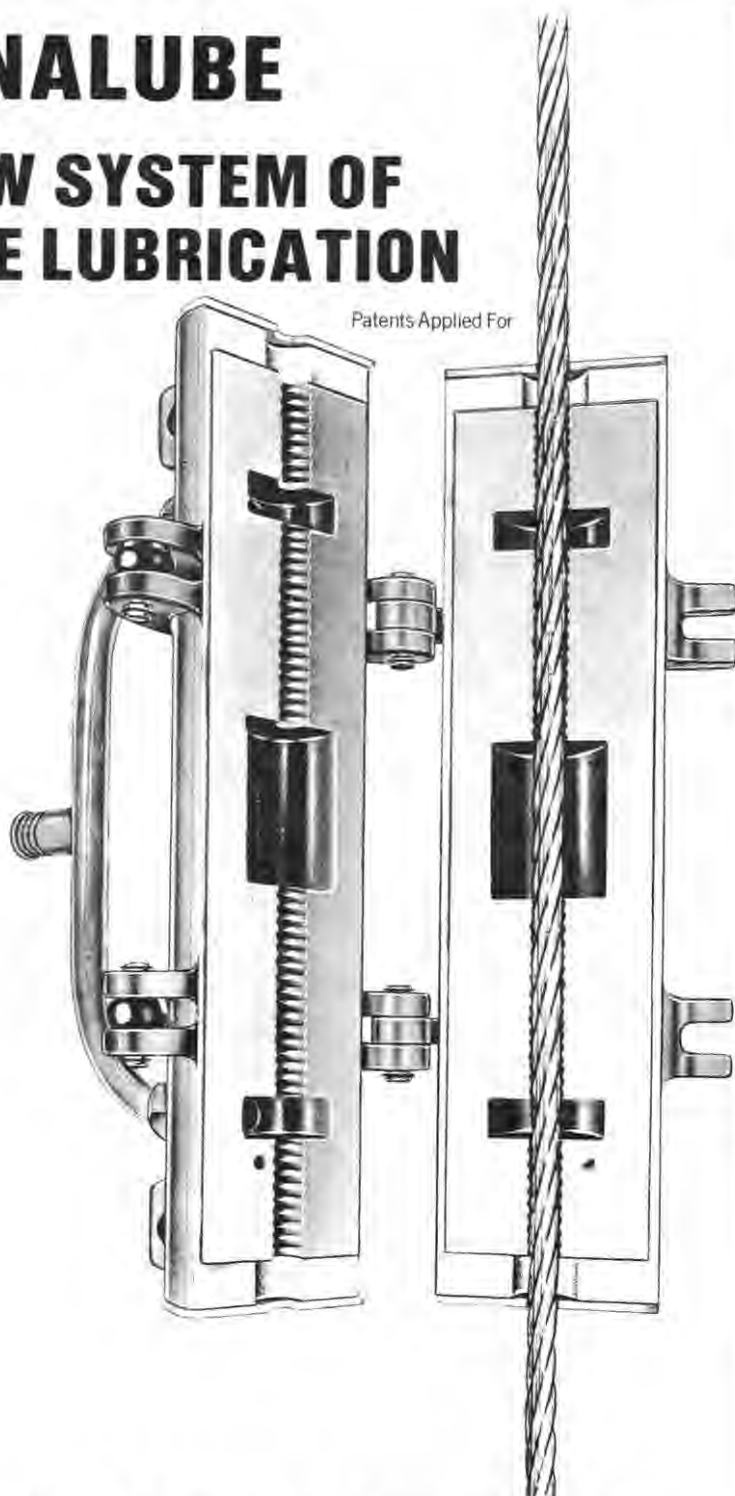

A wire rope is a complicated and carefully designed piece of equipment but, as such, it is extremely vulnerable to mis-use and abuse. All Manufacturers of wire rope are adamant that '...effective lubrication is vital...and is an overwhelming consideration.'