




## NEW STYLE TURNBUCKLES:

COMBINING THE BEST FEATURES  
OF THE STANDARD AND SURE  
LOCK TURNBUCKLES

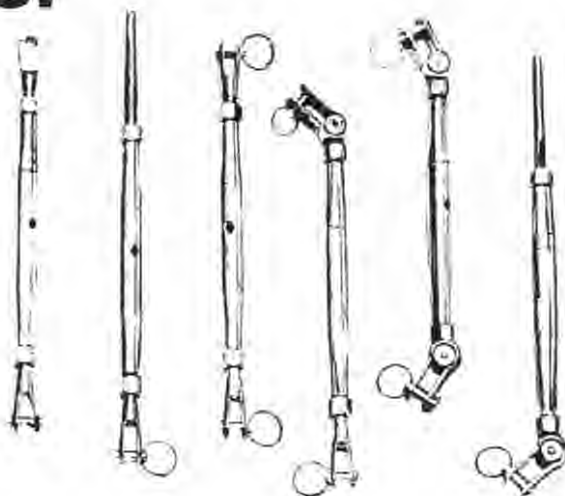

| Part No.  | Type             | Wire Size        | Thread | Length            |                   | Pin  | Right Hand | Left Hand |
|-----------|------------------|------------------|--------|-------------------|-------------------|------|------------|-----------|
|           |                  |                  |        | Closed            | Open              |      |            |           |
| 1812-3551 | Jaw & Jaw        | $\frac{1}{16}$ " | 10-32  | 4 $\frac{3}{8}$ " | 5 $\frac{1}{4}$ " | RL-1 | RL-30-ARH  | RL-30-ALH |
| 1812-3382 | Jaw & Swaged End | $\frac{1}{16}$ " | 10-32  | 4 $\frac{3}{8}$ " | 5 $\frac{1}{4}$ " | RL-1 | RL-38-AB   | RL-30-ALH |

2" Barrel. Approximate tensile strength over 1700 lbs. Thread size 10-32. Inside width of jaw  $\frac{5}{16}$ ". Length between centers: closed 4 $\frac{3}{8}$ ",  $\frac{2}{3}$  open 5 $\frac{1}{4}$ ". Weight 1 oz.

|           |                 |                                   |       |                   |    |      |          |           |
|-----------|-----------------|-----------------------------------|-------|-------------------|----|------|----------|-----------|
| 1812-3352 | Toggle & Toggle | $\frac{1}{16}$ - $\frac{3}{32}$ " | 12-28 | 6 $\frac{1}{2}$ " | 9" | RL-2 | RL-59-RH | RL-59-LH  |
| 1812-3350 | Jaw & Toggle    | $\frac{1}{16}$ - $\frac{3}{32}$ " | 12-28 | 6 $\frac{1}{2}$ " | 9" | RL-2 | RL-59-RH | RL-30-BLH |

3 $\frac{1}{2}$ " Barrel. Approximate tensile strength over 2200 lbs. Thread size 12-28. Inside width of jaw  $\frac{1}{4}$ ". Length between centers: closed 6 $\frac{1}{2}$ ",  $\frac{2}{3}$  open 9". Weight 2 $\frac{1}{4}$  ozs.

|          |                     |                                  |                   |    |                   |        |                           |                           |
|----------|---------------------|----------------------------------|-------------------|----|-------------------|--------|---------------------------|---------------------------|
| 812-3350 | Jaw & Jaw           | $\frac{3}{32}$ - $\frac{1}{8}$ " | $\frac{1}{4}$ -28 | 7" | 9 $\frac{3}{4}$ " | RL-2   | RL-30-CRH                 | RL-30-CLH                 |
| 812-3351 | Jaw & Jaw           | $\frac{3}{32}$ - $\frac{1}{8}$ " | $\frac{1}{4}$ -28 | 7" | 9 $\frac{3}{4}$ " | RL-2-0 | RL-30-CRH                 | RL-30-CRH                 |
| 812-3352 | Toggle & Toggle     | $\frac{1}{8}$ - $\frac{1}{4}$ "  | $\frac{1}{4}$ -28 | 7" | 9 $\frac{3}{4}$ " | RL-2   | RL-60-RH                  | RL-60-LH                  |
| 812-3353 | Toggle & Toggle     | $\frac{3}{32}$ - $\frac{1}{8}$ " | $\frac{1}{4}$ -28 | 7" | 9 $\frac{3}{4}$ " | RL-3   | RL-60-RH( $\frac{1}{4}$ ) | RL-60-LH( $\frac{1}{4}$ ) |
| 812-3354 | Jaw & Toggle        | $\frac{3}{32}$ - $\frac{1}{8}$ " | $\frac{1}{4}$ -28 | 7" | 9 $\frac{3}{4}$ " | RL-2   | RL-60-RH                  | RL-30-CRH                 |
| 812-3385 | Jaw & Swaged End    | $\frac{1}{12}$ "                 | $\frac{1}{4}$ -28 | 7" | 9 $\frac{3}{4}$ " | RL-2   | RL-38-CC                  | RL-30-CLH                 |
| 812-3386 | Toggle & Swaged End | $\frac{1}{12}$ "                 | $\frac{1}{4}$ -28 | 7" | 9 $\frac{3}{4}$ " | RL-2   | RL-38-CC                  | RL-60-LH                  |
| 812-3387 | Jaw & Swaged End    | $\frac{1}{8}$ "                  | $\frac{1}{4}$ -28 | 7" | 9 $\frac{3}{4}$ " | RL-2   | RL-38-CD                  | RL-30-CLH                 |
| 812-3388 | Toggle & Swaged End | $\frac{1}{8}$ "                  | $\frac{1}{4}$ -28 | 7" | 9 $\frac{3}{4}$ " | RL-2   | RL-38-CD                  | RL-60-LH                  |
| 812-3359 | Jaw & Eye           | $\frac{3}{16}$ - $\frac{1}{4}$ " | $\frac{1}{4}$ -28 | 7" | 9 $\frac{3}{4}$ " | RL-2   | RL-30-CE                  | RL-30-CLH                 |

4" Barrel. Approximate tensile strength over 2800 lbs. Thread size  $\frac{1}{4}$ -28. Inside width of jaw  $\frac{1}{4}$ ". Length between centers: closed 7",  $\frac{2}{3}$  open 9 $\frac{3}{4}$ ". Weight 2 $\frac{3}{4}$  ozs.

|          |                          |                  |                    |                   |     |      |          |           |
|----------|--------------------------|------------------|--------------------|-------------------|-----|------|----------|-----------|
| 812-3381 | Jaw & Swaged End         | $\frac{5}{32}$ " | $\frac{5}{16}$ -24 | 8 $\frac{1}{4}$ " | 11" | RL-3 | RL-38-DE | RL-30-DLH |
| 812-3382 | Jaw, Toggle & Swaged End | $\frac{5}{32}$ " | $\frac{5}{16}$ -24 | 8 $\frac{1}{4}$ " | 11" | RL-3 | RL-38-DE | RL-61-DLH |
| 812-3383 | Jaw & Swaged End         | $\frac{3}{16}$ " | $\frac{5}{16}$ -24 | 8 $\frac{1}{4}$ " | 11" | RL-3 | RL-38-DF | RL-30-DLH |
| 812-3384 | Toggle & Swaged End      | $\frac{3}{16}$ " | $\frac{5}{16}$ -24 | 8 $\frac{1}{4}$ " | 11" | RL-3 | RL-38-DF | RL-61-DLH |

4 $\frac{1}{2}$ " Barrel. Approximate tensile strength over 3200 lbs. Thread size  $\frac{3}{8}$ -24. Inside width of jaw  $\frac{1}{4}$ ". Length between centers: closed 8 $\frac{1}{4}$ ",  $\frac{2}{3}$  open 11". Weight 3 $\frac{3}{4}$  ozs.