





Nylon Rope Thimbles Heart shaped and round

Reference No.	h	rope diameter	rope circumference
Heart shaped			
F1444	17mm	3mm	$\frac{3}{8}$ "
F1445	22mm	4mm	$\frac{1}{2}$ "
F1288	32mm	5mm	$\frac{5}{8}$ "
F974	40mm	6mm	$\frac{3}{4}$ "
F1182	55mm	8mm	1"

Reference No.	h	rope diameter	rope circumference
F985	65mm	10mm	$1\frac{1}{4}$ "
F1235	70mm	12mm	$1\frac{1}{2}$ "
F1308	77mm	14mm	$1\frac{3}{4}$ "
F1481	90mm	16mm	2"
Round			
F1110	25mm	9mm	$1\frac{1}{8}$ "

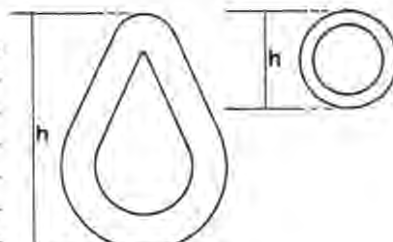


Nylon Pulleys

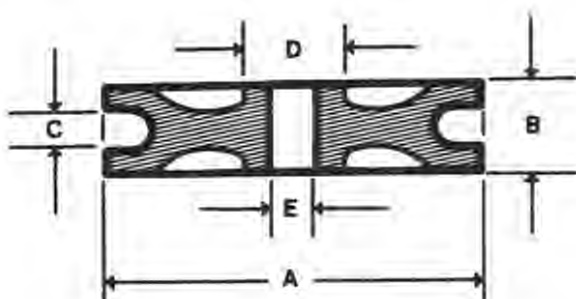

Reference No.	A	nominal dimensions mm			
		B	C	D	E
F1391	57	12	8	13	7.9
F1394	80	12	9	25	12
F1395	25	7	4	9	6.3
F1396	38	20	14*	20	9.5


*flat bottom V section groove

Nylon Rollers

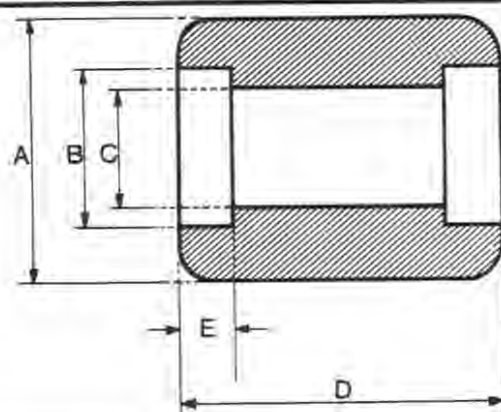

Part number	A	B	C	D	E	Maximum load capacity
F1568	50	—	14	50	—	250 kilos
F1533	75	32	28	62	10	450 kilos
F1645	81.5	47	39	70	14	570 kilos
F1644	81.5	47	39	104	12.5	850 kilos
F1446	85	47	39	90	20	780 kilos
F1691	85	47	39	95	20	800 kilos

Polyacetal inner and outer races Nylon type 66 cages Glass balls

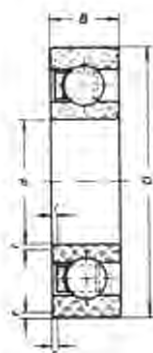

Ref No	d mm	Tolerance μ m	D mm	Tolerance μ m	B mm	Tolerance μ m	r mm
608	8	+58 0	22	0 -84	7	0 -90	0.5
626	6	+48 0	18	0 -84	6	0 -75	0.5
6000	10	+58 0	26	0 -84	8	0 -90	0.5
6001	12	+70 0	28	0 -84	8	0 -90	0.5
6002	15	+70 0	32	0 -100	9	0 -90	0.5
6003	17	+70 0	35	0 -100	10	0 -90	0.5
6004	20	+84 0	42	0 -100	12	0 -110	1.0
6005	25	+84 0	47	0 -100	12	0 -110	1.0
6006	30	+84 0	55	0 -120	13	0 -110	1.5

Ref No	d mm	Tolerance μ m	D mm	Tolerance μ m	B mm	Tolerance μ m	r mm
6201	12	+70 0	32	0 -100	10	0 -90	1.0
6202	15	+70 0	35	0 -100	11	0 -110	1.0
6204	20	+84 0	47	0 -100	14	0 -110	1.5
6205	25	+84 0	52	0 -120	15	0 -110	1.5
6300	10	+58 0	35	0 -100	11	0 -110	1.0
6301	12	+70 0	37	0 -100	12	0 -110	1.5
6302	15	+70 0	42	0 -100	13	0 -110	1.5
6303	17	+70 0	47	0 -100	14	0 -110	1.5