




ZINC ANNODES

MIL SPEC. A-18001-H

Specifications of Components (%)

Fe	0.005	max
Cd	0.025	—0.15
Pb	0.006	max.
Cu	0.005	max.
Al	0.10	—0.5
Si	0.125	max.
Zn	Remainder	

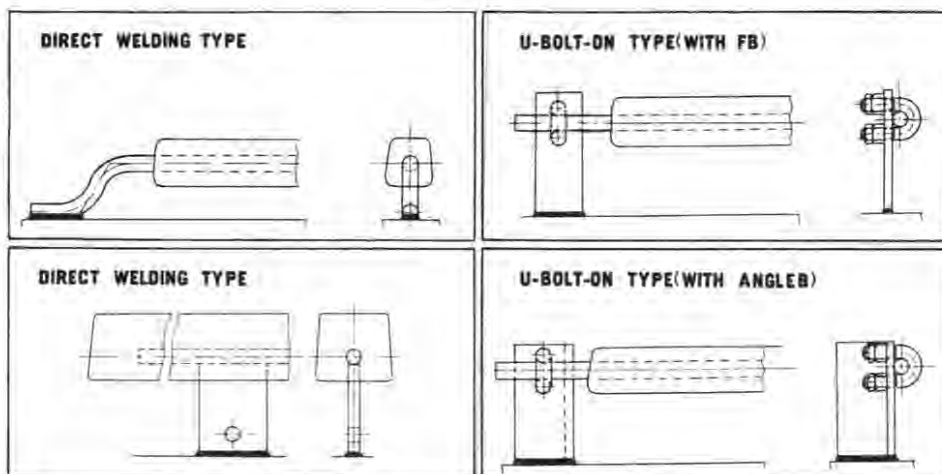

Standard products for ballast tanks of ships.

Type	Nominal Size (mm)	Nominal Weight (kg)	Core (mm)	Life (Yrs)				
				Permanent Ballast			Cleaned Ballast	
				30 %	40 %	50 %	30 %	40 %
SN-2	37×37×1000	10.4	13	2				
-4	54×53.5×1000	21.5	16	4				2
SO-2	44×43×1000	14.0	13		2		2	
-4	63×62×1000	28.9	16		4			3
SP-2	48×49×1000	17.5	13			2		
-4	74×74×1000	40.1	16			4		4
58P-1.22	35.5×35.5×1220	11.3	13	2				
80P-1.2	42×42×1200	15.8	13		2		2	
118P-1.22	51×51×1220	23.0	13	4		2		2
160P-1.22	63×63×1220	33.3	13		4		4	
200P-1.22	70×70×1220	43.0	13			4		
216P-1.22	76×76×1220	46.5	13					4
SR	34×36×1200	10.8	13	2				
ST	48×52×1230	23.0	13	4				

NOTE : Other types of ZINNODE are available on request.