



W.J. KEATING LIMITED

RATCHET HOISTS

Roughneck

Roughneck is easy to operate and use and is furnished with flexible heat treated steel load chain.

Short handle and compactness make the Roughneck easy to use in tight areas. Roughneck has no brakes to slip, load is always in positive control.


Critical parts are weather protected for outdoor use.

Roughneck is practically maintenance free, requiring only occasional oiling of the chain, hook necks and dogs.

Roughneck is a very handy tool. It can be used as a hoist and puller and will operate in any position. It can be stored in most standard tool boxes.



FULL ONE YEAR WARRANTY

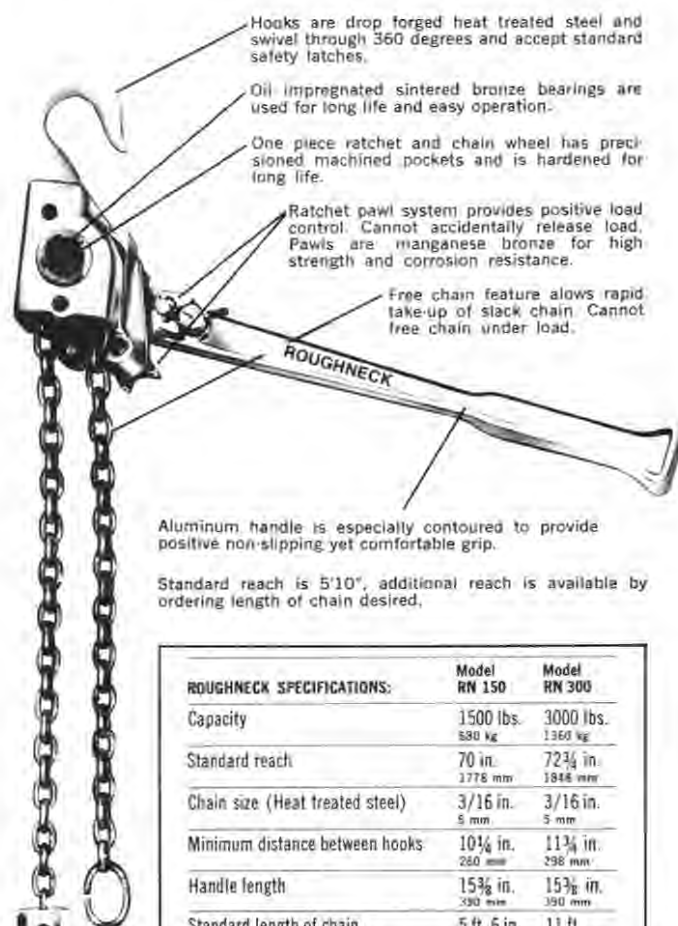

Hooks are drop forged heat treated steel and swivel through 360 degrees and accept standard safety latches.

Oil impregnated sintered bronze bearings are used for long life and easy operation.

One piece ratchet and chain wheel has precision machined pockets and is hardened for long life.

Ratchet pawl system provides positive load control. Cannot accidentally release load. Paws are manganese bronze for high strength and corrosion resistance.

Free chain feature allows rapid take-up of slack chain. Cannot free chain under load.

Aluminum handle is especially contoured to provide positive non-slipping yet comfortable grip.

Standard reach is 5'10", additional reach is available by ordering length of chain desired.

ROUGHNECK SPECIFICATIONS:	Model RN 150	Model RN 300
Capacity	1500 lbs. 680 kg	3000 lbs. 1360 kg
Standard reach	70 in. 1778 mm	72 3/4 in. 1848 mm
Chain size (Heat treated steel)	3/16 in. 5 mm	3/16 in. 5 mm
Minimum distance between hooks	10 1/4 in. 260 mm	11 3/4 in. 298 mm
Handle length	15 3/8 in. 390 mm	15 3/8 in. 390 mm
Standard length of chain	5 ft. 6 in. 1.67 m	11 ft. 3.35 m
Handle pull @ capacity load	85 lbs. 39 kg	100 lbs. 45 kg
Net weight	7 lbs. 3.2 kg	9 1/2 lbs. 4.3 kg
Envelope size	18x5x3 1/4 457x127x 83 mm	18x5x3 1/4 457x127x 83 mm