




UNDERWATER HYDRAULIC TOOLS

SPECIFICATIONS

MODEL	K-4019	K-4024	K-4023	K-4022	K-4020	K-4021
	7" Wheel			9" Disc	Impact Wrench	
Description	Grinder	Drill	Saw	Grinder	1" Sq. Dr.	1½" Sq. Dr.
Weight (Lbs.)	15½	13½	13	13	27	32½
Length (Ins.)	21½	22	16	16	19	20
Speed (R.P.M.)	0-4500	0-600	0-5000	0-5000	0-1200	0-950
Operating Pressure	1000	1500	1000	1000	800	1000
Maximum Pressure	2000	2000	2000	2000	2000	2000
Required Flow Rate	8 G.P.M.	8 G.P.M.	8 G.P.M.	8 G.P.M.	6 G.P.M.	6 G.P.M.
Inlet	9/16 - 18 S.A.E. STRAIGHT THREAD					
Outlet	3/4 - 16 S.A.E. STRAIGHT THREAD					

25 ton C-Frame Shop Press

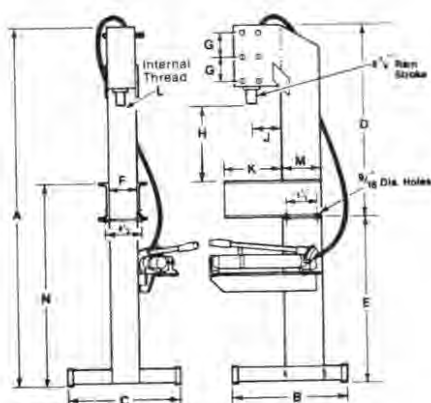

SPM256C (with optional pedestal)

A	B	C	D	E	F	G	H
77½"	24½"	24"	41½"	36"	6"	5"	10¼" Ram 15¼" Re- 20¼"tracted
J	K	L	M	N	Floor Space		
6½"	12½"	1½"-16"	8"	43"	24" x 24½"		



A COMPLETE LINE
OF SHOP PRESSES

