




HEAVY DUTY SHEAVES



AVAILABLE IN THREE TYPES

1. Cast steel with tapered (24" and larger) or straight roller bearings (20" and smaller).
2. Cast steel with bronze bushing.
3. Cast steel finish-bored without bushing.

Heavy duty Sheaves are available in a wide range of standard sizes from 8" to 36½" outside diameters—for wire rope sizes from 7/16" to 1¼". Grooves are precisely machined to assure proper fit for the wire rope. When ordering sheaves, be sure to specify type wanted, wire rope size, and outside diameter.

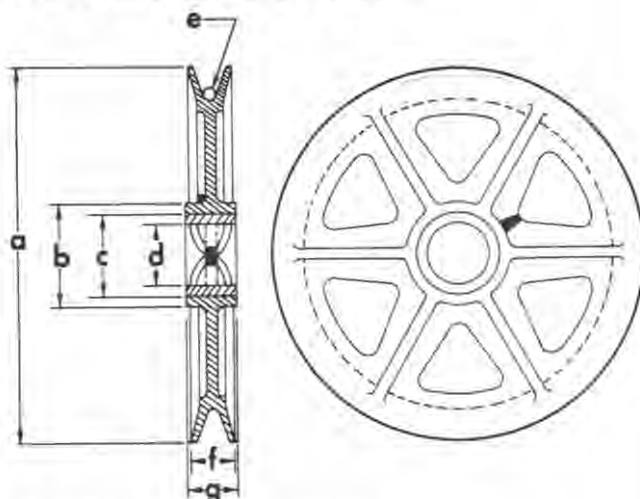

***BE SURE TO CHECK SHEAVE PIN SIZE WHEN ORDERING
20" OR 24" SHEAVES**

Part No.	Outside Diameter a	Pitch Diameter	Hub Diameter b	Bushing or Bearing Outside Diameter c	Shaft Diameter d	Wire Rope Size e	Thickness At Rim f	Length of Hub g	Finished Weight Lbs.
086-1400	8	7⅜	3	2⅝	1⅝	⅜	1⅝	1¼	6¼
086-1428	10	9¼	3	2⅝	1⅝	⅝	1⅝	1¼	9½
086-1446	12	10⅝	4¼	3¼	2½	⅝	1¾	2	20
086-1464	14	12½	4¼	3¼	2½	¾	1¾	2	23
086-1482	15BP	13½	4½	3¾	2½	¾	1¾	2	30
086-1507	16	14¼	4¼	3¾	3	⅞	2⅝	2⅜	30
086-1525	18	16⅞	4¾	3¾	3	⅞	2⅝	2⅜	40
086-1543	18BP	16½	5¼	4¼	3¼	¾-⅞	1⅞	2	40
086-1561	20	18⅞	5½	4¼	3¼	1	2¼	2½	46
086-1589	24	21⅝	6	5	3½	1⅝	2¾	3	80
086-1605	30	27¼	8	7	5	1¼	3	3½	155
086-1623	30	26¾	8⅞	7	5	1¼	3¼	3½	168
086-1641	32½	30	9	7⅞	5	1¼	2⅞	3⅞	177
086-1669	36½	34	9	7⅞	5	1¼	2⅞	3⅞	194

Tolerance ±¼