





SWIVEL HOOKS



K-1020

- Forged, quenched and tempered.
- Rated capacity is permanently shown on each hook.

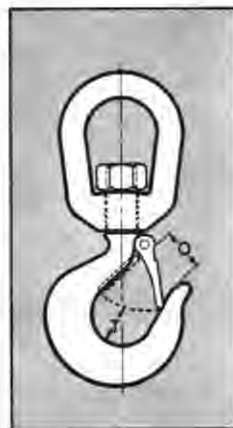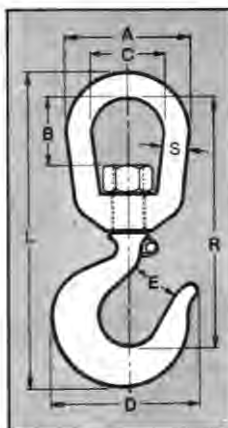

Swivel Hook
Dimensions with
Latch Assembled

Part No. Carbon	Part No. Alloy	Safe Working Load — Tons		DIMENSIONS IN INCHES										Weight Pounds Each
		C	A	A	B	C	D	E	L	R	S	T	Q	
902-5312	902-5508	¾	1	2	1 ⁵ / ₁₆	1 ¼	2 7/8	1 ⁵ / ₁₆	5 ⁹ / ₁₆	4 ¹⁵ / ₃₂	3 ⁵ / ₈	1 ³ / ₁₆	7/8	.75
902-5330	902-5526	1	1 ½	2 ½	1 ⁹ / ₁₆	1 ½	3 ³ / ₁₆	1 ¹ / ₃₂	6 ⁵ / ₈	5 ⁹ / ₃₂	1 ½	1 ³ / ₁₆	3 ¹ / ₃₂	1.25
902-5358	902-5544	1 ½	2	3	1 ⁵ / ₈	1 ¾	3 ⁵ / ₈	1 ¹ / ₁₆	7 ⁵ / ₈	6 ¹ / ₆₄	5 ⁵ / ₈	2 ⁷ / ₃₂	1	2.25
902-5376	902-5562	2	3	3	1 ⁹ / ₁₆	1 ¾	4 ³ / ₃₂	1 ⁷ / ₃₂	8 ¹ / ₈	6 ³ / ₈	5 ⁵ / ₈	1 ³ / ₁₆	1 ½	2.57
902-5394	902-5580	3	4 ½	3 ½	1 ¾	2	4 ¹⁵ / ₁₆	1 ½	9 ¹⁹ / ₃₂	7 ¹³ / ₃₂	3 ⁴ / ₈	1 ³ / ₈	1 ¹ / ₃₂	4.75
902-5410	902-5606	5	7	4 ½	2 ⁵ / ₁₆	2 ½	6 ¹ / ₂	1 ⁷ / ₈	12 ¹³ / ₃₂	9 ¹⁹ / ₃₂	1	1 ²⁵ / ₃₂	1 ¹ / ₁₆	10.29
902-5438	902-5624	7 ½	11	5	2 ³ / ₈	2 ¾	7 ⁹ / ₁₆	2 ¼	14 ¹ / ₂	11 ¹ / ₈	1 ¹ / ₈	2 ¹ / ₈	2 ¹ / ₁₆	16.25
902-5456	902-5642	10	15	5 ⁵ / ₈	2 ¹¹ / ₁₆	3 ¹ / ₈	8 ¹¹ / ₁₆	2 ½	15 ⁷ / ₈	12 ¹ / ₃₂	1 ¹ / ₄	2 ⁹ / ₁₆	2 ¹ / ₄	23.25
902-5474	902-5660	15	22	7	4 ³ / ₁₆	4	11	3 ³ / ₈	21 ¹ / ₁₆	16 ⁹ / ₁₆	1 ½	2 ⁷ / ₈	3	49.75
902-5492	902-5688	20	30	7	4 ³ / ₁₆	4	13 ⁵ / ₈	4	23 ⁷ / ₃₂	18 ¹ / ₁₆	1 ½	3 ⁷ / ₁₆	3 ⁵ / ₈	70.50

C — Carbon Steel

A — Hook-alloy Steel; Bail-carbon Steel

NOTE: Average proof load is twice safe working load. ¾ ton through 20 ton carbon — average straightening load (ultimate load) is five times safe working load. All alloy hooks — average straightening load (ultimate load) is four times safe working load.

Carbon Steel Hooks Supplied
Galvanized, Self Colour
Available.
Alloy Hooks Supplied Painted.