




W.J. KEATING LIMITED



TURNBUCKLE SPECIFICATIONS

Proof Load twice Safe Working Load • Ultimate Load five times Safe Working Load.

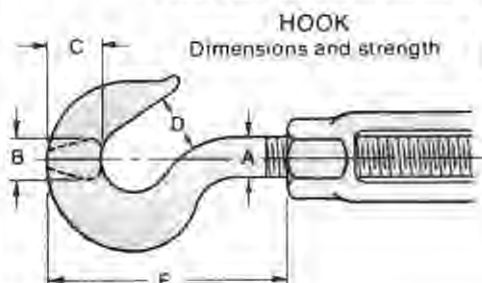

HOOK DIMENSIONS IN INCHES					Safe Working Load Lbs.
A	B	C	D	E	
1/4	1/4	1 1/32	2 1/8	1 1/2	400
5/16	5/16	1 1/8	1 1/2	1 1/2	700
3/8	3/8	2 1/8	2 1/8	2 1/8	1,000
1/2	1/2	2 1/2	2 1/2	2 1/2	1,500
5/8	5/8	3 1/8	3 1/8	3 1/8	2,250
3/4	3/4	4 1/8	4 1/8	4 1/8	3,000
7/8	7/8	5 1/8	5 1/8	5 1/8	4,000
1	1	6 1/8	6 1/8	6 1/8	5,000
1 1/4	1 1/4	8 1/8	8 1/8	8 1/8	5,000
1 1/2	1 1/2	10 1/8	10 1/8	10 1/8	7,500

EYE DIMENSIONS IN INCHES					Safe Working Load Lbs.
A	B	C	D	E	
1/4	1 1/32	2 1/32	2 1/32	1 25/32	500
5/16	7/16	3 1/32	3 1/32	2 1/16	800
3/8	1 1/32	4 1/32	4 1/32	2 1/8	1,200
1/2	2 1/32	5 1/32	5 1/32	2 3/8	2,200
5/8	3/8	6 1/32	6 1/32	3 1/8	3,500
3/4	1	7 1/32	7 1/32	4 1/16	5,200
7/8	1 1/4	8 1/32	8 1/32	5 1/8	7,200
1	1 1/2	9 1/32	9 1/32	6 1/8	10,000
1 1/4	1 3/4	11 1/32	11 1/32	7 3/4	15,200
1 1/2	2 1/8	12 1/32	12 1/32	8 3/8	21,400
1 3/4	2 3/8	13 1/32	13 1/32	10	28,000
2	2 1/2	14 1/32	14 1/32	12 1/8	37,000
2 1/2	3 1/8	16 1/32	16 1/32	13 1/8	60,000
2 3/4	3 1/4	17 1/32	17 1/32	15	75,000

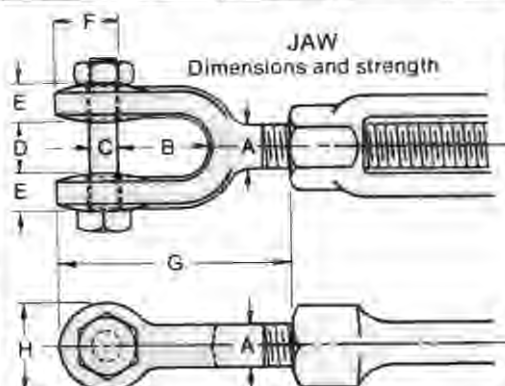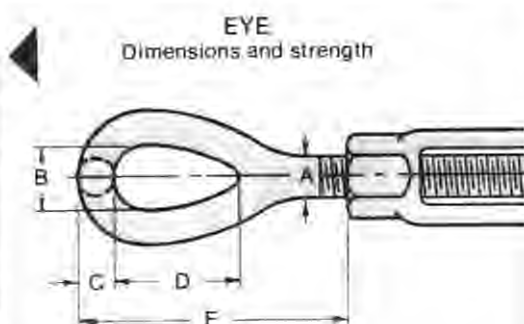


JAW DIMENSIONS IN INCHES								Safe Working Load Lbs.
A	B	C	D	E	F	G	H	
1/4	3/8	1 1/32	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	500
5/16	7/16	1 1/8	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	800
3/8	1 1/16	1 1/2	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	1,200
1/2	1 1/8	1 1/2	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	2,200
5/8	1 1/4	1 1/2	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	3,500
3/4	1 1/2	1 1/2	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	5,200
7/8	1 3/4	1 1/2	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	7,200
1	2 1/8	1 1/2	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	10,000
1 1/4	2 1/4	1 1/2	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	15,200
1 1/2	2 3/8	1 1/2	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	21,400
1 3/4	3 1/8	1 1/2	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	28,000
2	3 1/4	1 1/2	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	37,000
2 1/2	4 1/8	2 1/8	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	60,000
2 3/4	4 3/8	2 1/8	2 1/8	1 1/2	1 1/2	2 1/8	1 1/8	75,000

STUB END DIMENSIONS IN INCHES						Safe Working Load Lbs.
A	R	S	T	U	W	
1/4	4	4 3/4	3 1/8	2 1/8	10	500
5/16	4 1/2	5 1/8	3 1/8	2 1/8	10 1/4	800
3/8	5	5 1/2	3 1/8	2 1/8	16	1,200
1/2	6	6 1/2	3 1/8	2 1/8	16	2,200
5/8	6	6 3/4	3 1/8	2 1/8	16	3,500
3/4	6	7 1/8	3 1/8	2 1/8	17	5,200
7/8	6	7 3/8	3 1/8	2 1/8	18	7,200
1	6	8 1/8	3 1/8	2 1/8	19	10,000
1 1/8	6	8 3/8	3 1/8	2 1/8	19	12,400
1 1/4	6	8 1/2	3 1/8	2 1/8	20	15,200
1 3/8	6	8 3/4	3 1/8	2 1/8	20 1/2	18,000
1 1/2	6	9 1/8	3 1/8	2 1/8	21	21,400
1 5/8	6	9 3/8	3 1/8	2 1/8	21	25,000
1 3/4	6	10 1/8	3 1/8	2 1/8	22	28,000
2	6	11	3 1/8	2 1/8	23	37,000
2 1/2	6	13 1/8	3 1/8	2 1/8	25	60,000
2 3/4	24	31 1/2	3 1/8	2 1/8	44 1/2	75,000

STUB END TURNBUCKLES

Dimensions and strength



Dimension "W" figured with stubs screwed in as shown. To determine overall length of longer take-up turnbuckles add the difference in take-up.

All dimensions approximate and subject to minor changes without notice