



W.J. KEATING LIMITED

SPELTER SOCKETS

OPEN SPELTER SOCKETS

Forged Sockets $1\frac{1}{8}$ " thru $2\frac{3}{8}$ " available upon request
Alloy cast steel $1\frac{1}{2}$ " thru 4" Hot Dipped Galvanized

Part No.	Wire Rope Diam. Inches	DIMENSIONS IN INCHES								Weight Pounds Each
		A	C	D	F	J	L	M	N	
903-9613	$\frac{3}{4}$	4.56	.69	.75	.38	2.25	1.56	1.31	.31	.75
903-9637	$\frac{7}{16}$ - $\frac{3}{8}$	4.88	.81	.88	.50	2.25	1.75	1.56	.44	1.30
903-9655	$\frac{7}{16}$ - $\frac{1}{2}$	5.56	1.00	1.00	.56	2.50	2.00	1.94	.50	2.25
903-9673	$\frac{9}{16}$ - $\frac{3}{8}$	6.75	1.25	1.19	.69	3.00	2.50	2.25	.56	4.00
903-9681	$\frac{3}{4}$	7.94	1.50	1.38	.81	3.50	3.00	2.63	.63	5.83
903-9717	$\frac{7}{8}$	9.25	1.75	1.63	.97	4.00	3.50	3.13	.75	9.85
903-9735	1	10.56	2.00	2.00	1.13	4.50	4.00	3.75	.88	15.25
903-9753	$1\frac{1}{8}$	11.81	2.25	2.25	1.25	5.00	4.50	4.13	1.00	21.50
903-9771	$1\frac{1}{8}$ - $1\frac{1}{4}$	13.19	2.50	2.50	1.50	5.50	5.00	4.75	1.13	31.00
903-9799	$1\frac{1}{2}$	15.12	3.00	2.75	1.63	6.00	6.00	5.38	1.19	47.25
903-9815	$1\frac{1}{2}$	16.25	3.00	3.00	1.75	6.50	6.50	5.75	1.31	60.00
903-9833	$1\frac{1}{2}$ - $1\frac{3}{4}$	18.25	3.50	3.50	2.00	7.50	7.00	6.50	1.56	84.00
903-9851	2- $2\frac{1}{8}$	21.50	4.00	3.75	2.25	8.50	9.00	7.00	1.61	125.00
903-9879	2- $2\frac{1}{2}$	23.50	4.50	4.25	2.56	9.00	10.00	7.75	2.13	167.00
904-1630	2- $2\frac{3}{8}$	25.50	5.00	4.75	2.88	9.75	10.75	8.50	2.38	252.00
904-1651	2- $2\frac{3}{8}$ - $2\frac{1}{2}$	27.25	5.25	5.00	3.12	11.00	11.00	9.00	2.88	315.00
904-1679	3- $3\frac{1}{8}$	29.00	5.75	5.25	3.38	12.00	11.25	9.50	3.00	360.00
904-1697	3- $3\frac{1}{2}$ - $3\frac{3}{8}$	30.88	6.25	5.50	3.62	13.00	11.75	10.00	3.12	434.00
904-1713	3- $3\frac{1}{2}$ - $3\frac{3}{8}$	32.25	6.75	6.00	3.88	14.00	12.50	10.75	3.25	563.00
904-1731	3- $3\frac{1}{2}$ -4	36.25	7.50	7.00	4.25	15.00	13.50	12.50	3.50	783.00

Heavy duty sockets available. Dimensions approximately one size larger than rope size specified.

CLOSED SPELTER SOCKETS

Forged Sockets $1\frac{1}{8}$ " thru $2\frac{3}{8}$ " available upon request.
Alloy cast steel $1\frac{1}{2}$ " thru 4" Hot Dipped Galvanized


Part No.	Wire Rope Diam. Inches	DIMENSIONS IN INCHES								Weight Pounds Each
		A	B	C	D	F	J	K	L	
903-9897	$\frac{3}{4}$	4.56	.50	1.50	.81	.38	2.25	.50	1.81	.50
903-9913	$\frac{7}{16}$ - $\frac{3}{8}$	4.94	.62	1.69	.94	.50	2.25	.69	2.06	.75
903-9931	$\frac{7}{16}$ - $\frac{1}{2}$	5.50	.69	2.00	1.13	.56	2.50	.68	2.31	1.50
903-9959	$\frac{9}{16}$ - $\frac{1}{2}$	6.38	.81	2.63	1.38	.69	3.00	1.00	2.56	2.50
903-9977	$\frac{3}{4}$	7.63	1.06	3.00	1.63	.81	3.50	1.25	3.06	4.25
903-9995	$\frac{7}{8}$	8.88	1.31	3.63	1.88	.97	4.00	1.50	3.56	7.25
904-0019	1	10.00	1.44	4.13	2.25	1.13	4.50	1.75	4.06	10.50
904-0037	$1\frac{1}{8}$	11.13	1.56	4.50	2.50	1.25	5.00	2.00	4.56	14.25
904-0055	$1\frac{1}{8}$ - $1\frac{1}{4}$	12.31	1.69	5.00	2.75	1.50	5.50	2.25	5.13	19.75
904-0073	$1\frac{1}{2}$	14.13	3.00	5.38	3.13	1.63	6.00	2.50	6.13	28.00
904-0091	$1\frac{1}{2}$	15.38	2.13	5.75	3.25	1.75	6.50	2.75	6.75	38.25
904-0117	$1\frac{1}{2}$ - $1\frac{3}{4}$	17.50	2.19	6.75	3.53	2.00	7.50	3.00	7.81	57.25
904-0135	2- $2\frac{1}{8}$	19.75	2.44	7.63	3.78	2.25	8.50	3.25	8.81	77.25
904-0153	2- $2\frac{1}{4}$ - $2\frac{3}{8}$	21.63	2.88	8.50	4.28	2.50	9.00	3.63	9.75	105.00
904-1759	2- $2\frac{1}{2}$ - $2\frac{3}{8}$	23.50	3.12	9.50	5.50	2.88	9.75	4.00	10.62	140.00
904-1777	2- $2\frac{3}{4}$ - $2\frac{1}{2}$	25.50	3.00	10.75	6.25	3.12	11.00	4.88	11.25	220.00
904-1795	3- $3\frac{1}{8}$	27.00	3.25	11.50	6.75	3.38	12.00	5.25	11.75	276.00
904-1811	3- $3\frac{1}{2}$ - $3\frac{3}{8}$	29.25	4.00	12.25	7.25	3.62	13.00	5.75	12.25	313.00
904-1839	3- $3\frac{1}{2}$ -4	31.00	4.00	13.00	7.75	3.88	14.00	6.25	13.00	400.00
904-1857	3- $3\frac{1}{2}$ -4	33.25	4.25	14.25	8.50	4.25	15.00	7.00	14.00	540.00

Heavy duty sockets available. Dimensions approximately one size larger than rope size specified.

NOTICE: All cast steel spelter sockets $1\frac{1}{8}$ " and larger are magnetic particle inspected and ultrasonic inspected.
Proof testing available on special order.




K-1047

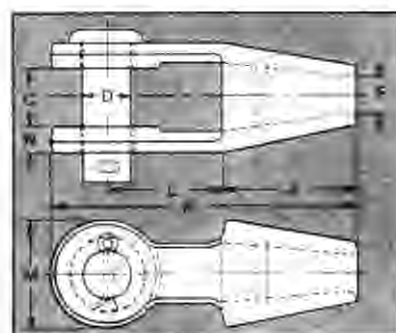

Note: Above drawing illustrates one groove used on sockets $\frac{3}{4}$ " and smaller. Sizes $\frac{7}{16}$ " to $1\frac{1}{2}$ " inclusive use 2 grooves. Sizes $1\frac{1}{2}$ " and larger use 3 grooves.



K-1048

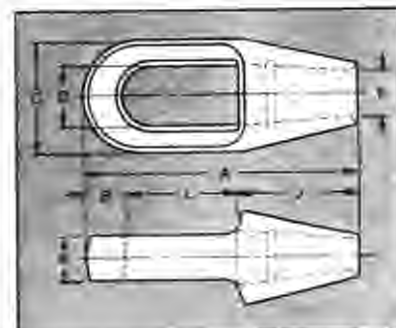

Note: Above drawing illustrates one groove used on sockets $\frac{3}{4}$ " and smaller. Sizes $\frac{7}{16}$ " to $1\frac{1}{2}$ " inclusive use 2 grooves. Sizes $1\frac{1}{2}$ " and larger use 3 grooves.

All dimensions approximate and subject to minor changes without notice.