




W.J. KEATING LIMITED

WEDGE SOCKETS • ROD ENDS

K-1049



OPEN WEDGE SOCKETS Cast Steel

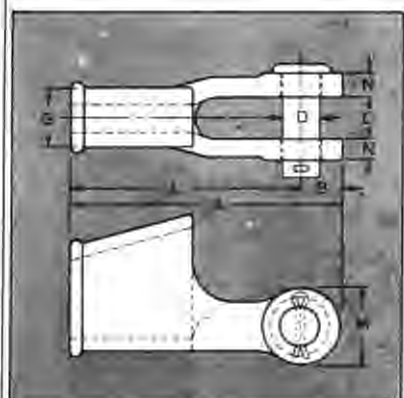

Part No.	Wire Rope Diam.† Inches	DIMENSIONS IN INCHES								Weight Pounds Each*
		A	B	C	D	G	L	M	N	
904-0304	3/8	5 5/8	7/8	1 3/16	1 3/16	1 1/8	4 3/4	1 9/16	7/16	2.00
904-0322	1/2	6 13/16	1 1/16	1	1	1 3/8	5 3/4	1 15/16	1/2	4.75
904-0340	5/8	8 5/32	1 7/32	1 1/4	1 3/16	1 3/4	6 15/16	2 1/4	9/16	8.50
904-0368	3/4	9 25/32	1 13/32	1 1/2	1 5/8	2 1/16	8 3/8	2 5/8	2 1/32	13.60
904-0386	7/8	11 5/32	1 21/32	1 3/4	1 5/8	2 5/16	9 1/2	3 1/8	3/4	20.50
904-0402	1	12 3/4	2	2	2	2 9/16	10 3/4	3 3/4	7/8	30.25
904-0420	1 1/8	14 3/8	2 1/4	2 1/4	2 1/4	2 15/16	12 1/8	4 1/4	1	43.50
904-0448	1 1/4	16	2 1/2	2 1/2	2 1/2	3 3/16	13 1/2	4 3/4	1 1/8	57.20

†For intermediate wire rope sizes use next larger size socket.

*Weight of socket, wedge and pin.

ROD ENDS Forged

Part No.	Shank Diam. Inches	Shank Length Std.† Inches	Outside Diam. Eye Inches	Max. Diam. Drilled Hole Inches	Min. Diam. Drilled Hole Inches	Safe Working Load When Threaded—Pounds*	Weight Each
904-3025	5/8	12	1 9/16	1 5/16	No Min.	3,500	1.50
904-3043	3/4	12	1 7/8	1 1/8	No Min.	5,200	1.95
904-3061	7/8	12	2 1/8	1 1/4	No Min.	7,200	2.85
904-3089	1	12	2 3/8	1 3/8	No Min.	10,000	4.25
904-3123	1 1/8	12-24	2 3/4	1 5/8	No Min.	12,400	5.15
904-3141	1 1/4	18	3	1 3/4	No Min.	15,200	9.25
904-3169	1 1/2	24	3 5/8	2 1/8	1 1/4	21,400	17.75
904-3187	1 3/4	24	4 5/16	2 9/16	1 13/16	28,000	24.25
904-3203	2	24	5	3	2 1/32	37,000	32.00
904-3212	2 1/2	24	6	3 1/2	2 1/2	60,000	49.75

*Based on thread size equal to specified shank diameter.

†Non-standard shank lengths available on special order.

•Ultimate load five times safe working load.

All dimensions approximate and subject to minor changes without notice.

K-1050



Stocked in blank only, not drilled. Size hole that can be drilled is shown in table. Thickness of eye same as shank diameter.