




W.J. KEATING LIMITED

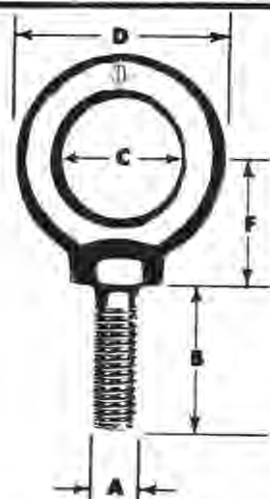

Drop Forged SHOULDER EYE BOLTS 1030 Steel Heat Treated

***WARNING**
RATED CAPACITY IS
DRASTICALLY REDUCED
WHEN LOADING AT ANY
ANGLE.
LOADING MUST NEVER
BE MADE AT AN ANGLE
GREATER THAN 45° FROM
BOLT CENTERLINE. AT
AN ANGLE OF 45° RATED
CAPACITY IS REDUCED TO
1/4 OF THE TABULATED
VALUE.

K-1074

Stock Number	Thread Diameter	Shank Length	I. D. of Eye	O. D. of Eye	C. of Eye to Base of Shoulder	** +-	*Rated Capacity in Lbs.	Approx. Weight per 100 pcs.
	(A)	(B)	(C)	(D)	(E)			
086-5406	1/4	1	1/2	15/16	1- 1/16	1/16	440	5
086-5424	1/4	1	3/4	1- 3/16	3/4	1/16	440	5.5
086-5442	5/16	1-1/8	5/8	1- 3/16	15/16	1/16	720	9.5
086-5460	5/16	1-1/8	7/8	1- 7/16	15/16	1/16	720	11
086-5488	3/8	1/2	1	1-11/16	1- 3/16	1/16	1080	13.5
086-5503	3/8	3/4	1	1-11/16	1- 3/16	1/16	1080	14
086-7002	3/8	1-1/4	3/4	1- 7/16	1	1/16	1080	13.5
086-7020	3/8	1-1/4	1	1-21/32	1- 1/8	1/16	1080	16
086-7048	7/16	1-3/8	1- 3/32	1-27/32	1- 1/4	1/16	1480	25
086-7066	1/2	1-1/2	1	1-15/16	1- 1/4	1/16	1960	34
086-7084	1/2	1-1/2	1- 3/16	2- 1/16	1- 3/8	1/16	1960	37
086-7100	5/8	1-3/4	1- 3/8	2- 1/2	1- 5/8	1/16	3160	67
086-5601	3/4	2	1- 1/2	2-13/16	1- 3/4	3/32	4600	105
086-5629	7/8	2-1/4	1-11/16	3- 1/4	2- 1/8	3/32	6400	160
086-5647	1	2-1/2	1-13/16	3- 9/16	2- 5/16	3/32	8400	221
086-5665	1-1/8	2-3/4	2	4	2-11/16	3/32	10000	345
086-5683	1-1/4	3	2- 3/16	4- 7/16	2-15/16	3/32	13400	466
086-5709	1-1/2	3-1/2	2- 1/2	5- 3/16	3- 5/16	1/8	18000	768
086-6209	1-3/4	3-3/4	2- 7/8	6- 1/16	4	1/8	21200	1173
086-6227	2	4	3- 1/4	6- 7/8	4- 3/8	1/8	27200	1703

*When Load Application is in Direction of Axis of Shank

**Center of Eye to Base of Shoulder Tolerance

Rated Capacity Figured with Factor of 5 to 1. Please include Stock Number and Size when ordering.