



**W.J. KEATING LIMITED**

# **REUSEABLE COMPRESSION GRIP COUPLINGS FOR GASOLINE AND FUELING HOSE**


*The original Compression Grip Coupling  
with over 30 years experience...*

*Proven on the pump and in the field...*

*Millions in use!*

Specify UNITED Compression Grip Couplings wherever  
a secure leak-proof fitting is required, including:

- Curb Pump Hose
  - Fuel Oil Hose
  - Tank Truck Hose
  - Aviation Refueling Hose
- and other petroleum hose.

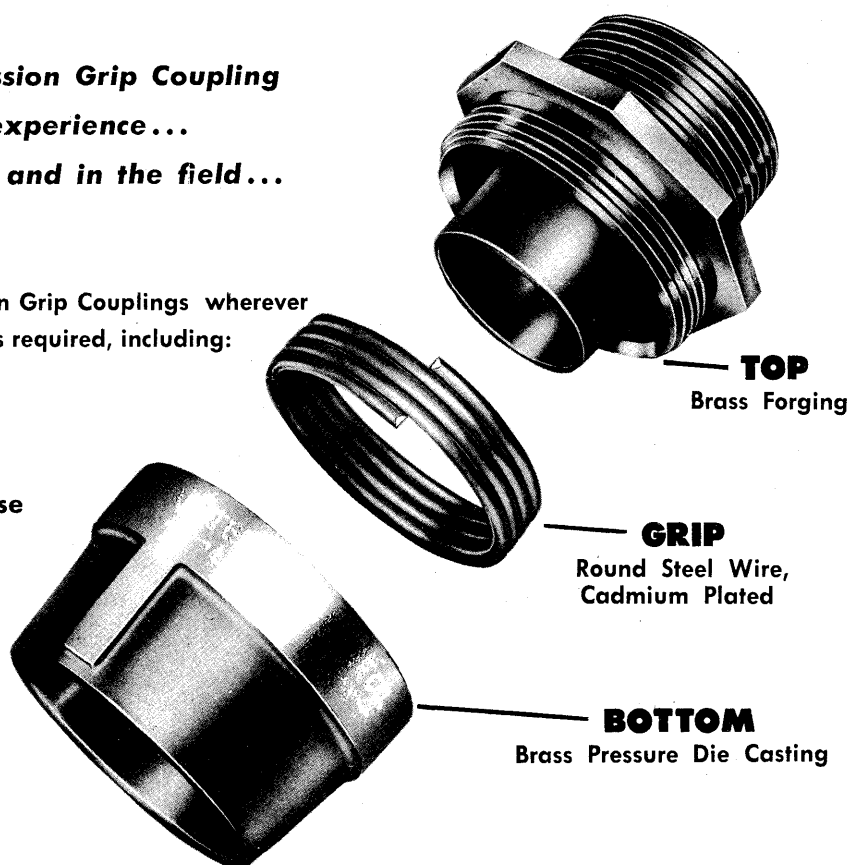

$\frac{3}{4}$ " to 4" Males and Swivel Females  
Standard threads,  
or furnished to customer specifications

Comply with numerous Government specifications  
requiring Reusable Compression Grip Couplings

**MILITARY SPECIFICATIONS**  
MIL-C-38404 CLASS 1 TYPE 1 AND 2  
MIL-H-11588  
MIL-H-21291  
MIL-H-17902  
MIL-H-22279  
MIL-H-38405  
MIL-H-4441  
MIL-H-370 STYLER






**W.J. KEATING LIMITED**

## PERMANENT HOSE COUPLINGS

Permanent Gasoline Pump Hose Coupling is a light-weight unit designed for greater durability and longer hose life. Sizes currently available are noted below:

DESCRIPTION SIZE INCHES	CAT. NO.	DIMENSION—INCHES								WEIGHT PER C.	NO. OF IDENTIFICATION NOTCHES
		A	B	C	D	E	F NPT	G	H		
5/8 x 3/4 x 1	1174	1-3/16	1-57/64	45/64	1-3/16	1-3/32	3/4-14	1	5/8	21 lbs	NONE
5/8 x 3/4 x 1-1/32	1174A	1-3/16	1-57/64	45/64	1-3/16	1-3/32	3/4-14	1-1/32	5/8	21	1
5/8 x 3/4 x 1-1/16	1174B	1-3/16	1-57/64	45/64	1-3/16	1-3/32	3/4-14	1-1/16	5/8	21	2
3/4 x 3/4 x 1-9/64	1170	1-5/16	2-1/8	45/64	1-27/64	1-1/4	3/4-14	1-9/64	3/4	26	NONE
3/4 x 3/4 x 1-11/64	1170B	1-5/16	2-1/8	45/64	1-27/64	1-1/4	3/4-14	1-11/64	3/4	26	2
3/4 x 3/4 x 1-13/64	1170C	1-5/16	2-1/8	45/64	1-27/64	1-1/4	3/4-14	1-13/64	3/4	26	3

DIMENSIONS ARE APPROXIMATE—FOR REFERENCE ONLY

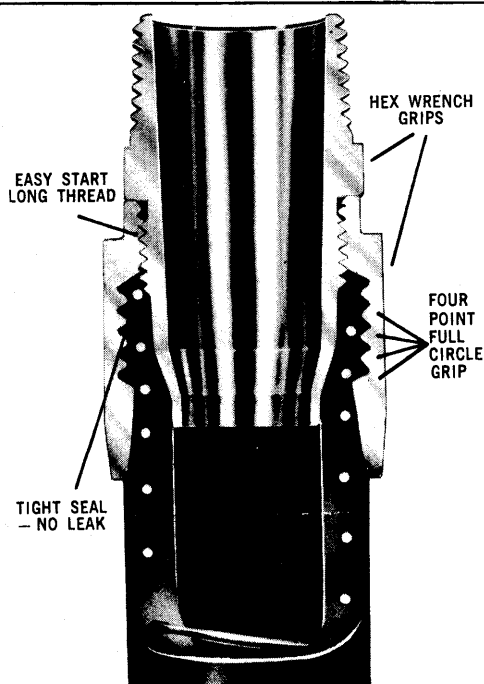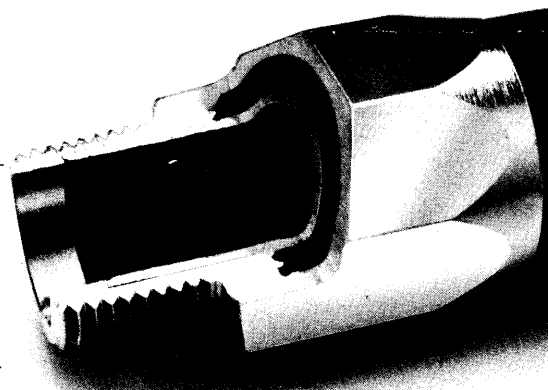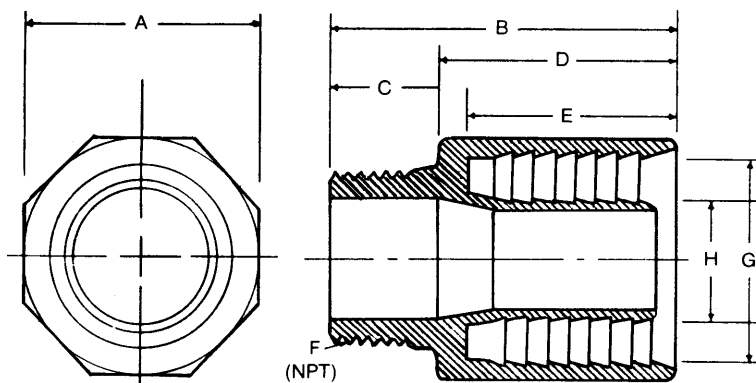

FOR 3/4" I.D. x 1 1/8" O.D. Hose  
3/4" NPT — No. 248  
1" NPT — No. 249

## REUSABLE COUPLINGS FOR CURB PUMP GASOLINE HOSE


- INCREASED HOSE LIFE
- NO LEAKS • NO PULL OUTS!!
- EASY, QUICK AND POSITIVE ASSEMBLY
- NO SPECIAL TOOLS • SMOOTH FLOW
- INSTALLATION ON ALL TYPES OF PUMPS
- NO EXCESSIVE INVENTORY
- QUICK REMOVAL AND REUSE ON NEW OR CUT DOWN HOSE
- PRECISION MACHINED — BRASS ROD—CHROME PLATED



## BRASS AIR LINE COUPLINGS

### POSITIVELY LOCKED

### INSTANTLY CONNECTED

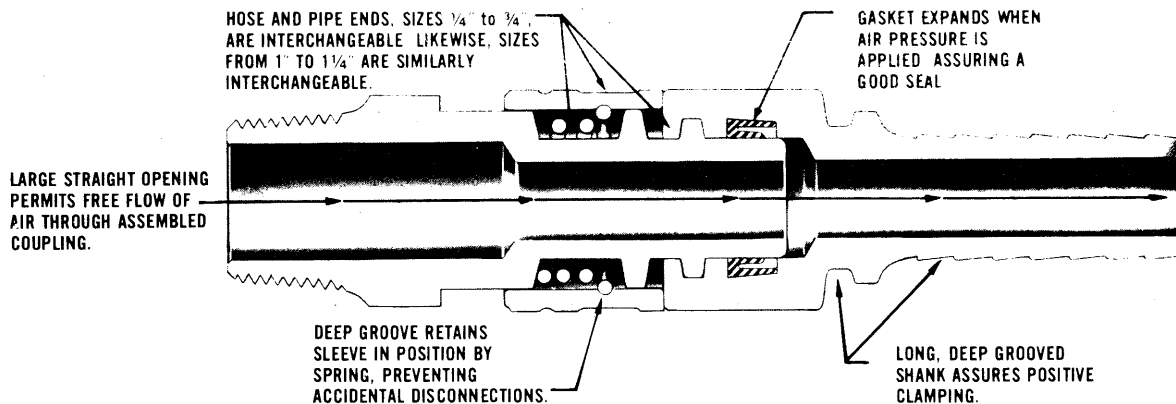

Couplings are airtight under all working pressures of 10 lbs. and above. Mechanically locked, they cannot be accidentally disconnected. A simple push and quarter-twist connects . . . and a slight pull on locking sleeve with a quarter-turn permits the male and female ends to be instantly separated. Couplings are available in hose or pipe ends from  $\frac{1}{4}$ " to 1 $\frac{1}{4}$ ". Sizes from  $\frac{1}{4}$ " to  $\frac{3}{4}$ " are interchangeable, as are sizes 1" to 1 $\frac{1}{4}$ ". Couplings are furnished as standard in Brass, however sizes  $\frac{3}{8}$ ",  $\frac{1}{2}$ " and  $\frac{3}{4}$ " are available in cadmium plated steel. Naval Brass is available on special quote in all sizes.

#### Hose Shank—Male End

HM

##### Size

$\frac{1}{4}$ "  
 $\frac{3}{8}$ "  
 $\frac{1}{2}$ "  
 $\frac{5}{8}$ "  
 $\frac{3}{4}$ "  
 1"  
 1 $\frac{1}{4}$ "  
 1 $\frac{1}{2}$ "



#### Hose Shank—Fem. End

HF

##### Size

$\frac{1}{4}$ "  
 $\frac{3}{8}$ "  
 $\frac{1}{2}$ "  
 $\frac{5}{8}$ "  
 $\frac{3}{4}$ "  
 1"  
 1 $\frac{1}{4}$ "  
 1 $\frac{1}{2}$ "



#### Outside Thrd.—Male End

OM

##### Size

$\frac{1}{4}$ "  
 $\frac{3}{8}$ "  
 $\frac{1}{2}$ "  
 $\frac{3}{4}$ "  
 1"  
 1 $\frac{1}{4}$ "  
 1 $\frac{1}{2}$ "



#### Outside Thrd.—Fem. End

OF

##### Size

$\frac{1}{4}$ "  
 $\frac{3}{8}$ "  
 $\frac{1}{2}$ "  
 $\frac{3}{4}$ "  
 1"  
 1 $\frac{1}{4}$ "  
 1 $\frac{1}{2}$ "



#### Inside Thrd.—Male End

IM

##### Size

$\frac{1}{4}$ "  
 $\frac{3}{8}$ "  
 $\frac{1}{2}$ "  
 $\frac{3}{4}$ "  
 1"  
 1 $\frac{1}{4}$ "  
 1 $\frac{1}{2}$ "



#### Inside Thrd.—Female End

IF

##### Size

$\frac{1}{4}$ "  
 $\frac{3}{8}$ "  
 $\frac{1}{2}$ "  
 $\frac{3}{4}$ "  
 1"  
 1 $\frac{1}{4}$ "  
 1 $\frac{1}{2}$ "





## AIR VALVES

Pressure Seated  
Brass AIR VALVES  
With Pressure Bleed

**VC-1**

**Gasket**


Neoprene  
Size  
3/4"



**2M**

**Double Outlet  
Manifolds**

For Valve	Inlet	Outlet
1/2"	3/4"	3/4"
3/4"	1"	1"




**RA**

**90° Angle Valve**

Outlet—Inlet

1/4" — 1/2"  
3/8" — 1/2"  
3/8" — 1/2" Control Plate  
1/2" — 3/4"  
3/4" — 1"




**A**

**30° Angle Valve**

Outlet—Inlet

1/2" — 3/4"  
3/4" — 1"




**P0**

**Parallel Port Valve**

Outlet—Inlet


3/8" — 1/2"  
1/2" — 3/4"  
3/4" — 1"  
1" — 1 1/4"



**LW**

**2—Way Outlet Valve**

Valve Size	Size of Inlet	Size of Outlet
3/8"	3/4"	3/8"
1/2"	1"	1/2"
3/4"	1 1/4"	3/4"



Equipped  
with  
Alemite Fittings



Neutral or Off Position



Exhaust Position




Supply Position

**SR**

**Straight Port Valve**

Outlet—Inlet


1/4" — 1/4"  
3/8" — 3/8"  
1/2" — 1/2"  
3/4" — 3/4"  
1" — 1"



**FWL**

**4—Way Valve**

Valve Size	Size of Inlet	Size of Outlet
3/8"	1"	3/8"
1/2"	1 1/4"	1/2"



Equipped  
with  
Alemite Fittings



Left Hand Supply  
Right Hand Exhaust



Neutral or Off Position




Right Hand Supply  
Left Hand Exhaust



# W.J. KEATING LIMITED

## AGRICULTURAL & INDUSTRIAL JACKS

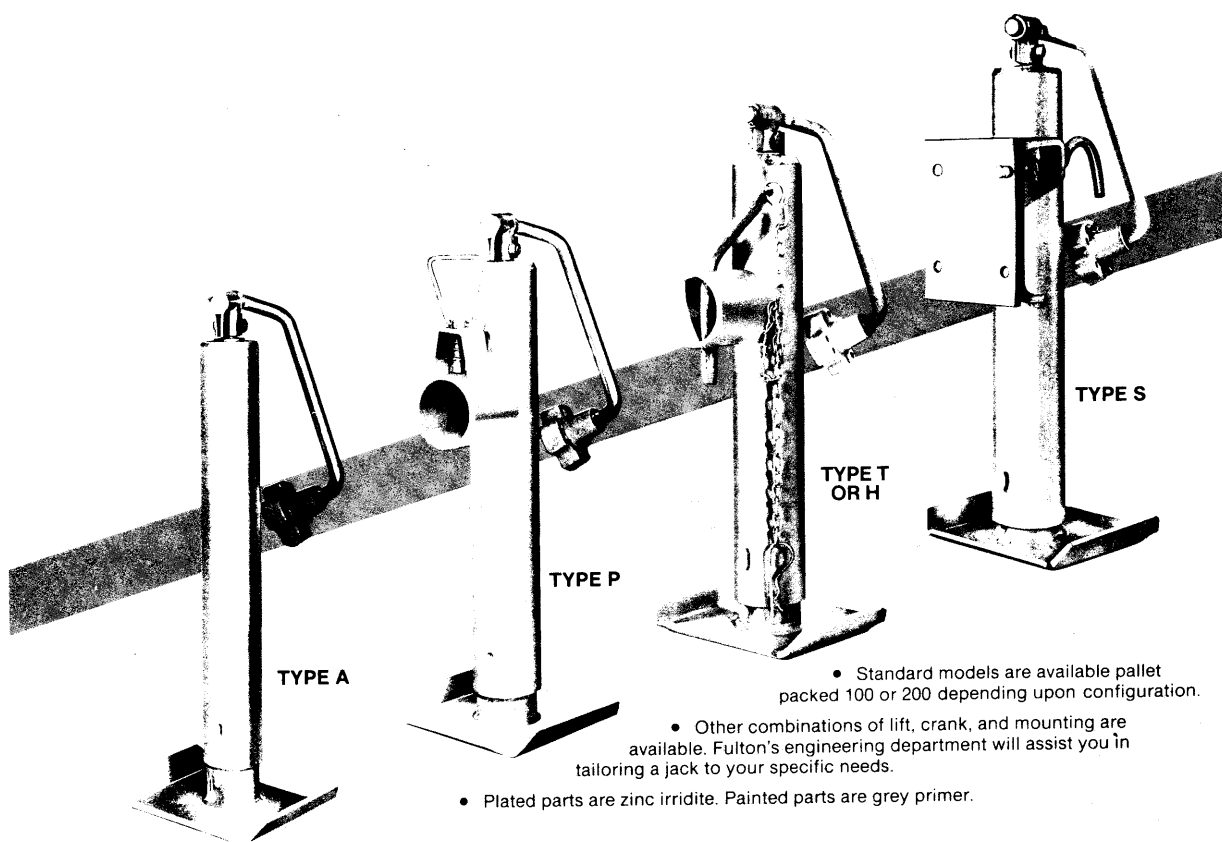

### STANDARD MODELS:

Fulton Model No.	Rating		Lift		Crank		Mounting				Collapsed Dimension		Morris Midwest Reference No.	
	2000 lb.	5000 lb.	10"	15"	Top	Side	A	P	S	T/H	A	B		
210SS15	•	•	•			•			•		15	11	978026	B78S
210ST15	•	•	•			•				•	15	11	978024	B78T
210TA15	•	•	•		•		•				15	11	978002	78A
210TP15	•	•	•		•			•			15	11	978001	78P
210TT15	•	•	•		•				•		15	11	978019	78T
215ST20	•	•		•		•				•	20	16	978036	B83T
215TT20	•	•		•		•				•	20	16	978030	83T
510SS15		•	•			•			•		15	11	988061	B88S
510SH15		•	•			•			•		15	11	988011	B88T
510TP15		•	•		•			•			15	11	988002	88P
510TS15		•	•		•				•		15	11	988017	88S
510TH15		•	•		•				•		15	11	988005	88T
515TS20		•		•		•				•	20	16	988049	93S
515TH20		•		•		•				•	20	16	988045	93T
515SS20		•		•		•				•	20	16	988069	B93S
515SH20		•		•		•				•	20	16	988067	B93T

### TOP & SIDE VIEW

