



Stainless Forged Fittings

Regular and Shoulder Eyebolts

Non-magnetic, drop forged from 18/8 stainless, Type 304. All have UNC-2, righthand thread. Heavy hex nuts supplied. Available in other grades of stainless steel on special order.



Regular Nut
K-1120



Regular Rivet
K-1121



Shoulder Nut
K-1122




Shoulder Rivet
K-1123

Diameter and Length of Shank, Inches	Stock Numbers				Dimensions, Inches				Thread Length, Inches	Weight Per 100, Pounds	Working Load Limit*, Pounds
	M-28-ST	M-29-ST	M-30-ST	M-31-ST	Plain		Shoulder				
					I.D.	O.D.	I.D.	O.D.			
1/4 x 2	640-5101	640-5001	640-5201	640-5301	1/2	1	1/2	7/8	1 1/2	9	460
1/4 x 4	640-5102	640-5002	640-5202	640-5302	1/2	1	1/2	7/8	2 1/2	12	460
5/16 x 2 1/4	640-5103	640-5003	640-5203	640-5303	5/8	1 1/8	5/8	1 1/8	1 1/2	16	780
5/16 x 4 1/4	640-5104	640-5004	640-5204	640-5304	5/8	1 1/8	5/8	1 1/8	2 1/2	17	780
3/8 x 2 1/2	640-5105	640-5005	640-5205	640-5305	3/4	1 1/2	3/4	1 3/8	1 1/2	24	1,160
3/8 x 4 1/2	640-5106	640-5006	640-5206	640-5306	3/4	1 1/2	3/4	1 3/8	2 1/2	30	1,160
1/2 x 3 1/4	640-5107	640-5007	640-5207	640-5307	1	2	1	1 3/4	1 1/2	54	2,150
1/2 x 6	640-5108	640-5008	640-5208	640-5308	1	1 13/16	1	1 3/4	3	69	2,150
5/8 x 4	640-5109	640-5009	640-5209	640-5309	1 1/4	2 1/2	1 1/4	2 1/4	2	104	3,440
3/4 x 4 1/2	640-5111	640-5011	640-5211	640-5311	1 1/2	2 7/8	1 1/2	2 3/4	2	165	5,140
7/8 x 5	640-5113	640-5013	640-5213	640-5313	1 3/4	3 3/8	1 3/4	3 1/4	2 1/2	260	7,130
1 x 6	640-5115	640-5015	640-5215	640-5315	2	4	2	3 3/4	3	390	9,370

Connecting Links

Integrally forged pins join the halves of links together. Interlocking lugs distribute the load. Type 304 stainless. Other sizes available on special order.

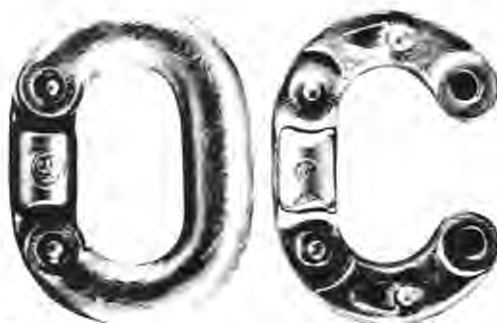

K-1117

Size, Inches	Stock Number	Overall Dimensions, Inches	Inside Dimensions, Inches	Weight, Pounds	Working Load Limit*, Pounds
3/8	640-3506	1 1/2 x 1 1/8	1 3/16 x 5/8	20	1,440

*Warning: Do not exceed Working Load Limit.