




ADJUSTABLE PEDESTAL FAIRLEAD

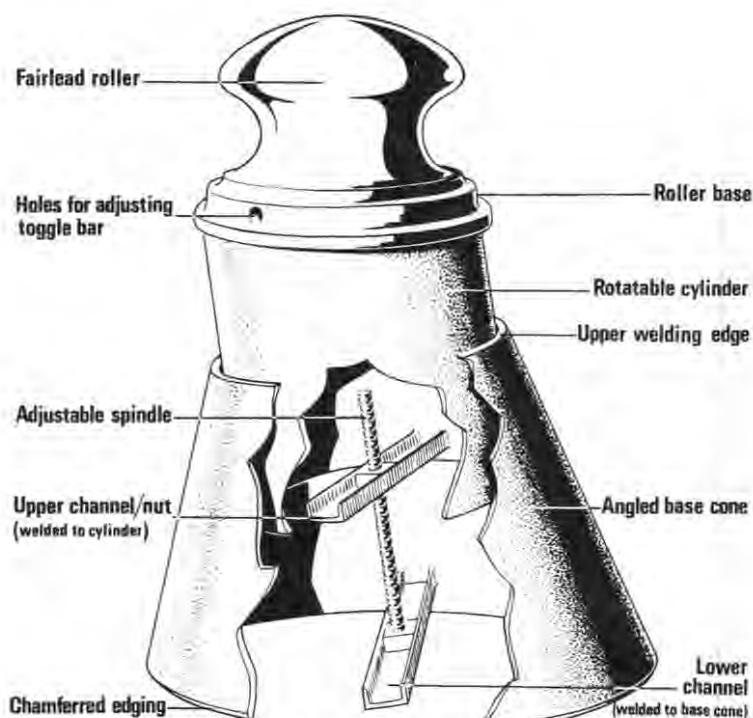

K-2042

- 1 *Infinitely variable for height and angle of fairlead roller between ample limits.*
- 2 *Eliminates complex individual manufacture to suit variations in sheer and camber of deck, and height and angle of fairlead — one pedestal does the lot.*
- 3 *All round economy in time and materials.*
- 4 *Easily fitted — position on deck, insert toggle bar and rotate cylinder to give required height and angle, then weld.*
- 5 *Supplied as a complete unit. Base cone ready cropped and chamfered at welding edges. No further treatment required.*
- 6 *Sound construction with no cut-away or access holes to weaken design and permit access of water.*
- 7 *Complementary angles of base cone and cylinder can permit close location of unit to adjacent deck structures.*
- 8 *Available in complete range of sizes to accommodate all tonnage requirements.*
- 9 *Separate rope retaining horn supplied for attaching to roller base, where required.*
- 10 *Adjustable Pedestal Units can be supplied without roller if required.*

Part No.	ROLLER DIA. AT WAIST Ins. mm.		DIA. OF CONE BASE Ins. mm.		DIA. OF TUBE Ins. mm.	
086-2766	8	203	36	914	20	508
086-2784	10	254	36	914	20	508
086-2800	12	305	36	914	20	508
086-2828	14	356	40	1016	24	610
086-2846	16	406	40	1016	24	610