




W.J. KEATING LIMITED

SELF-ALIGNING FAIRLEADS - deck-mount models

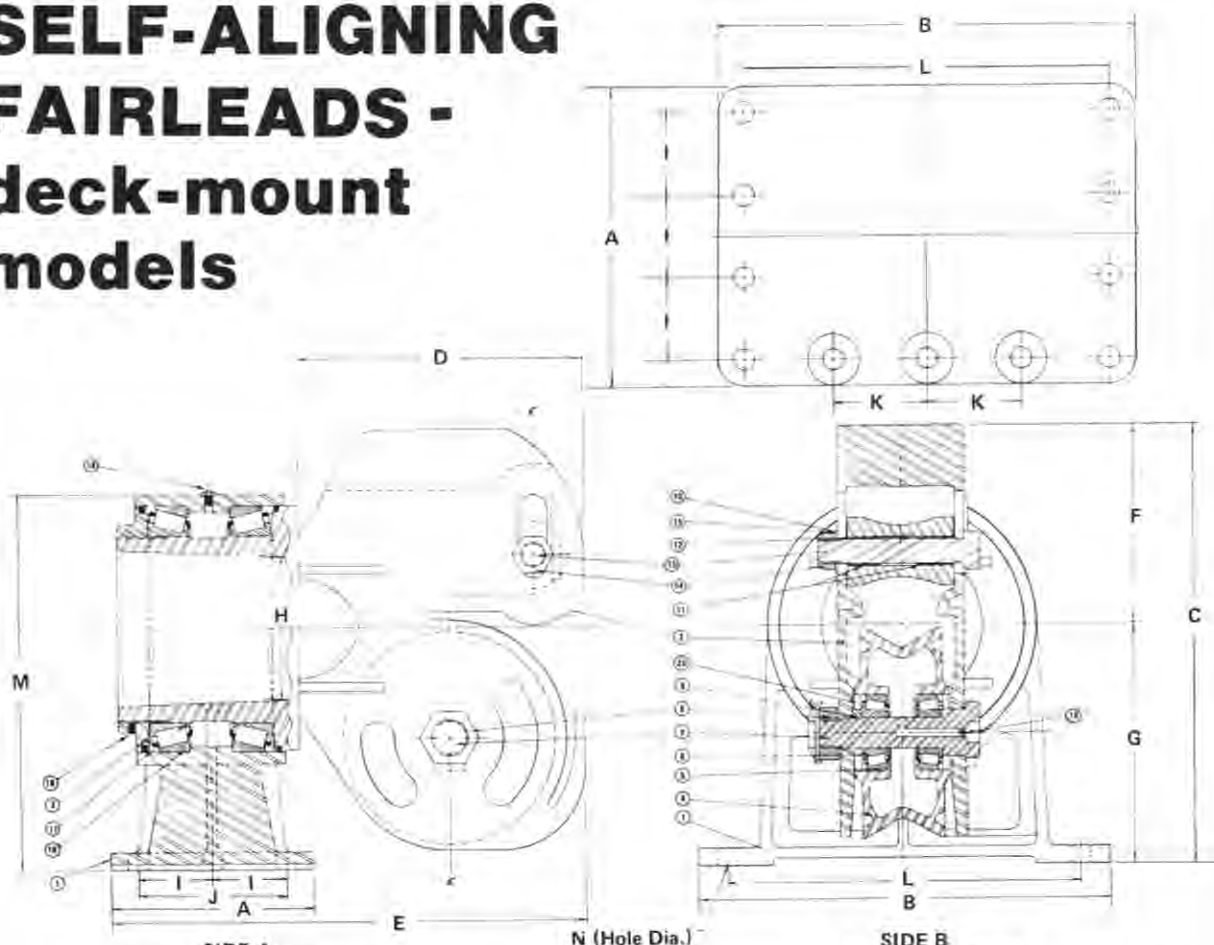

SIDE A
O = No. of Holes Side A

SIDE B
P = No. of Holes Side B

Sheave Diameter	Line Size	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Weight
4	1/4 - 5/16	5	7 5/8	8 1/4	5 3/4	9 1/2	3 5/16	5	1 3/4	3 3/4	3 3/4	—	6 3/8	7 1/8	9 1/16	2	—	33 lbs.
6	3/8 - 7/16	7 1/2	9 1/4	12 1/16	6 1/8	13 7/16	5 1/4	6 13/16	2	5 3/4	5 3/4	—	7 7/8	9 9/16	15 1/16	2	—	70 lbs.
7	1/2 - 9/16	8	11	14 1/2	9 1/4	15 1/2	6 3/8	8 1/8	3 1/8	6	6	—	9 1/2	11 5/8	13 1/16	2	—	105 lbs.
8	5/8	7 3/4	16	16 11/16	11 1/2	16 1/8	7 13/16	8 7/8	2 1/4	2 13/16	5 5/8	—	13 3/4	12 3/8	13 1/16	3	—	185 lbs.
8	5/8	7 1/2	15 1/4	16 1/8	10 1/2	17 1/2	7 1/4	8 3/4	5 1/4	2 3/4	5 1/2	—	13	13 3/4	13 1/16	3	—	170 lbs.
10	7/8 - 1	12	20	20 1/2	14 1/4	24 1/2	8 3/4	10 1/2	3	3	9	—	17 3/8	15	1 1/32	4	—	435 lbs.
10	7/8 - 1	20	12	20 1/4	12 1/4	21 7/8	8 3/4	11 1/2	6	3	17 1/4	—	9	17 1/8	1 1/32	4	—	400 lbs.
12	1 - 1 1/8	23	24	22 7/8	13	42	10 5/8	12 1/2	3	9 1/2	19	—	20 3/4	20	1 9/16	3	—	750 lbs.
12	1 - 1 1/8	18	24	23 1/2	14	30 7/8	10	13 1/2	6 7/8	4 11/16	14	5 1/8	20 1/2	20 1/4	1 9/16	4	3	700 lbs.
14	1 1/4 - 1 3/8	24 1/4	30 1/2	28 5/8	18 1/2	44 3/4	12 7/8	14 1/2	5 1/2	6 5/8	19 7/8	—	26 1/4	23 1/4	1 9/16	4	—	1350 lbs.
14	1 1/4 - 1 3/8	22	30 1/2	31 7/8	17 3/8	28 5/8	14 1/2	17 1/2	7 3/4	6 1/8	18 1/4	6 7/8	26 3/4	26 1/2	1 9/16	4	3	1200 lbs.

- | | | | |
|---------------|--------------------|-------------------|---|
| 1 Base | 6 Bearing Cone | 11 Roller Bushing | 16 Bearing Cup |
| 2 Barrel | 7 Sheave Pin | 12 Roller | 17 Bearing Cone |
| 3 Barrel Nut | 8 Sheave-pin Nut | 13 Roller Pin | 18 Barrel Set Screw (4" - 8" models only) |
| 4 Sheave | 9 Bearing Retainer | 14 Roller-pin Nut | 19 Grease Fitting |
| 5 Bearing Cup | 10 Washer | 15 Washer | 20 Sheave Bearing Seals |